




FEATURES

- Allows standard triplex pump to generate flow pulsations on demand to improve nozzle movement and cleaning power in sewer cleaning applications
- Simple operation allows both full-flow and pulsation modes
- Large, easy-to-grasp handle allows gloved operation
- Designed and made in the USA
- Easy installation - simply replace middle valve cap and valve on any TT, EZ, 47 or TX 63 Series pump

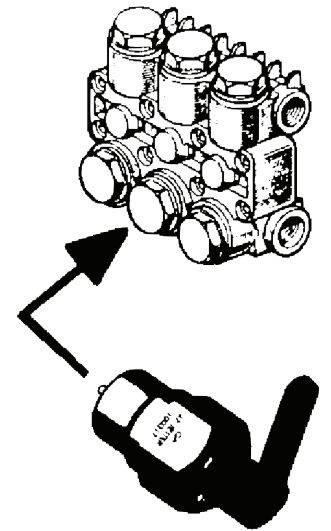

SPECIFICATIONS

Part Numbers: For TT Series Pumps	100315
For EZ or TX 63 Series Pumps	100316
For 47 Series Pumps (Coarse Thread)	100317
For 47 Series Pumps (Fine Thread)	100072
Maximum Pressure	5000 PSI
Dimensions	1.25" Hex; 2.5" from center to handle edge; 2.5" from manifold to valve top
Weight	.5 lb
Materials	Brass, Buna-N, Teflon, Stainless Steel

Note: This valve reduces pump flow by 1/3 when engaged; prolonged use can result in a run-dry condition that will decrease plunger seal life.



General Pump
is a member of
the Interpump Group

