




6P Companies, Inc. 1174 Northland Drive Mendota Heights, MN 55120 Tel: 651.454.6500 Fax: 651.454.8015 Email: sales@gpcompanies.com www.generalpump.com



• 99% alumina-ceramic

OVERALL PUMP DIMENSIONS: 13.3" x 9.6" x 6.2"

and wear

• Competitors plungers are only 97%

· Increases resistance to pitting

Superior strengh

Easily replaceable

• Smoothest possible surface

results in longer seal life





66 Series Applications

Pressure Cleaning Applications Pre-painting Surface Preparation:

Surface cleaning Paint removal Wet-sandbasting

Heavy Equipment Maintenance:

Dirt and mud removal Grease and oil removal Parts washing

Contract Cleaning:

Building exterior cleaning Sidewalk cleaning Driveway cleaning Deck cleaning Mobile vehicle wash General cleaning

Vehicle Wash Applications

Self-service carwash Multiple gun prep stations

Inudstrial Applications *Misting/Fogging:*

Evaporative cooling Fire suppression Tower cooling Power generation

Industrial Process:


Hydraulic ram/press operation Hydrostatic testing

Industrial Cleaning:

General cleaning Surface stripping Scale removal Industrial pressure wash Trailer mount systems In-plant stationary systems Large portable systems

Food Processing:

Poultry deboning Sanitation

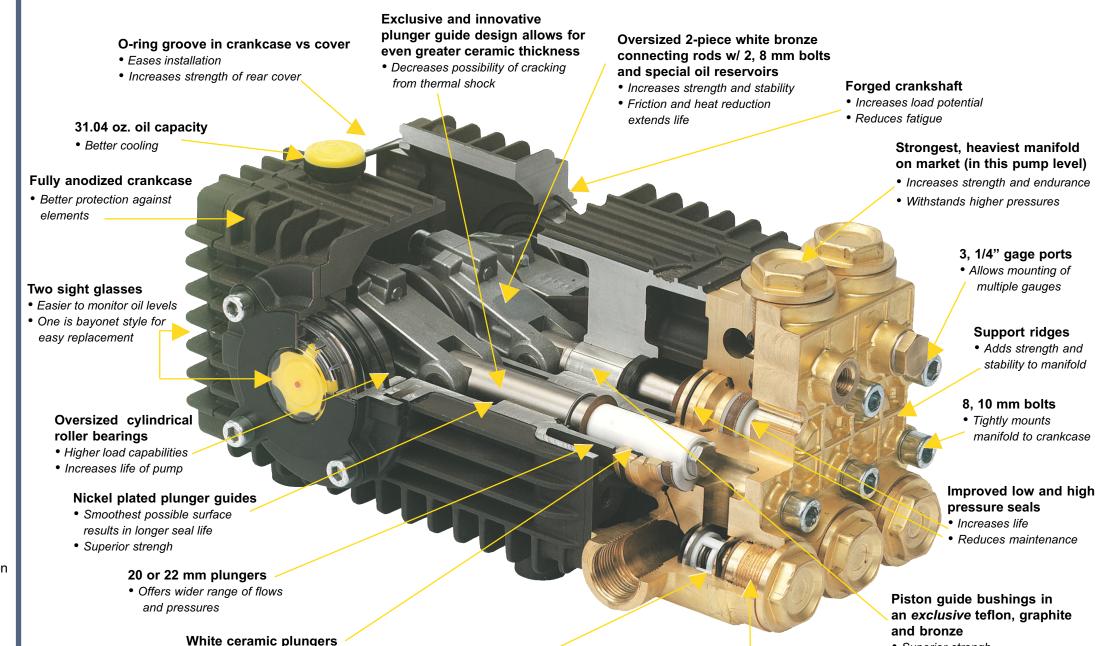

Positive aligning valve cap

- Makes changing valves fool proof
- Allows for "quiet" operation

Innovative new valve cap design - O-ring placement prevents contact with water!

- Prevents O-ring extrusion
- Increases hydrostatic performance
- Valves easily serviced without dismantling manifold

Pump Models



TSF2019

Flow: 6.3 to 7.6 GPM
Pressure: 3600 PSI
RPM: 1450/1750
Bore: 20mm, Stroke: 19mm
EHP: 15.5/18.7



TSF2021

Flow: 7.0 to 8.5 GPM Pressure: 3600 PSI RPM: 1450/1750 Bore: 20mm, Stroke: 21mm EHP: 17.3/21.0



TSF2219

Flow: 7.7 to 9.3 GPM
Pressure: 3000 PSI
RPM: 1450/1750
Bore: 22mm, Stroke: 19mm
HP: 15.8/19.1



TSF2221

Flow: 8.5 to 10.2 GPM Pressure: 3000 PSI RPM: 1450/1750 Bore: 22mm, Stroke: 21mm HP: 17.5/21.0