



MOSMATIC

High Pressure Cleaning Technology



TKA SERIES


Turbo Rotor Arm



self rotating
high quality components

For more information contact your Distributor or visit us on the web at www.mosmatic.com

The complete stainless versions of these various cleaning units are specially designed for use with water and cleaning additive at high r.p.m. MOSMATIC Turbo-Rotor from the TKA series for use as a self-rotating unit on: Flat Surface Cleaners, Tire Cleaner Applicators, Parts Washers, Undercarriage Cleaners

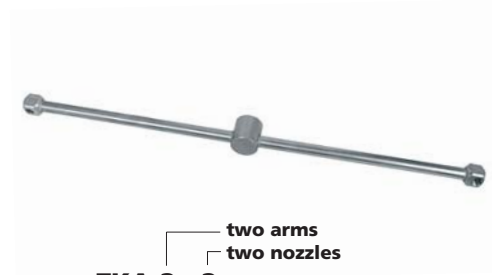

two arms
two nozzles
TKA-2w2



TKA-3w3 (for 3 Nozzles)




TKA-4w4 (for 4 Nozzles)

Part. No.	D
82.805	4"
82.806	6"
82.807	8"
82.808	10"
82.809	12"
82.810	14"
82.811	16"
82.812	18"
82.813	20"
82.814	22"
82.815	24"


Part. No.	D
82.865	4"
82.866	6"
82.867	8"
82.868	10"
82.869	12"
82.870	14"
82.871	16"
82.872	18"
82.873	20"
82.874	22"
82.875	24"

Part. No.	D
82.831	8" / 8"
82.833	14" / 8"
82.837	16" / 10"
82.842	18.5" / 14"
82.843	20" / 14"


Available styles




"h" - style regular



"f" - style low profile



"s" - style adjustable



"w" - style welded

Technical Data „w“-style

Throughput Medium:	water, cleaning additive pH 3-12
Pressure:	4000 psi
Temperature:	maximum 250°F
Body:	stainless steel
Pipe:	stainless steel
In:	G3/8" F
Out:	1/8" NPTF

- important: do not use unprotected

- other versions or sizes upon request
- use with 1/8" Nozzles

Choose from these swivel lines:

	1/4" NPTF	3/8" NPTF
DYC	55.063	55.163
DYL	56.063	56.163
DYG	57.063	57.163
DYF	58.063	58.163
DYT	59.063	59.163

Distributed by: