



STAINLESS STEEL 4 WHEEL FRAME



Powered by an industrial grade Honda GX620 or GX670 engine with steel gas tank, engine oil alert, and electric start.



STAINLESS STEEL

Powered by **HONDA** ENGINES

Industrial triplex pump with oil sight glass, oil drain plug, adjustable unloader, and external bypass hose.




PULLEY SYSTEM. Dual cogged B belt system to help prevent slippage.


INDUSTRIAL STRENGTH STAINLESS STEEL ROLL CAGE FRAME: Comes with four 13" pneumatic tires, threaded bolt-on axle, and a large 4 gallon top mounted gas tank with drip tray.



General TS2021 85.139.026B




General T5050 85.139.018B



Comet TW5050S 85.149.059B



Comet HWS5040S 85.149.030B



Comet TW10025 85.149.064B



Comet TW8030 85.149.062B

#	Model#	Engine	Pump	PSI	GPM	Weight
55	PE-4020HWEBSKOM	Honda Electric Start GX620 (20.0)	Comet HWS5040S	4,000	5.3	290 lbs
56	PE-4020HWEBSGEN	Honda Electric Start GX620 (20.0)	General TS2021	3,500	5.6	290 lbs
57	PE-5024HWEBSKOM	Honda Electric Start GX670 (24.0)	Comet TW5050	5,000	5.0	290 lbs
58	PE-5024HWEBSGEN MODEL SHOWN	Honda Electric Start GX670 (24.0)	General T5050	5,000	5.0	290 lbs
59	PE-3024HWEBSKOM	Honda Electric Start GX670 (24.0)	Comet TW8030	3,000	8.0	290 lbs.
60	PE-2524HWEBSKOM	Honda Electric Start GX670 (24.0)	Comet TW10025	2,500	10.0	290 lbs.

*Battery may not be able to ship with all carriers.

** Batteries must be charged.

Additional Features

- 19,600-25,000 Cleaning units
- Thermal Relief Valve Protects the Pump from Overheating
- Safety Relief Valve
- 36" Insulated Lance
- Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle
- Industrial 5,000 PSI Spray Gun
- Electric Start
- Comes wrapped & strapped on a pallet



STAINLESS STEEL FRAMES GEARDRIVE

Powered by an industrial grade Honda GX670 engine with engine oil alert, and electric start.

Powered by
HONDA
ENGINES



STAINLESS STEEL

INDUSTRIAL STRENGTH STAINLESS FRAME:
Comes with 13" foam-filled tires, aluminum mags, and threaded bolt-on axle.




Gearbox-driven industrial triplex pump with oil sight glass, oil drain plug, adjustable unloader, and external bypass hose.



- Die cast aluminum alloy crank case for protection again corrosion.
- Piston guides are heat treated stainless steel.
- Stainless steel check valves.
- Single piece, solid bronze alloy connecting rods.

GAS TANK KITS

**Units do not come with a gas tank! See out optional portable kits.*



Part#	Optional Kits
31103	3 Gallon Gas Tank
31109	9 Gallon Gas Tank

#	Model#	Engine	Pump	PSI	GPM	Weight
61	PE-5024HWEGSCOM <small>MODEL SHOWN</small>	Honda Electric Start GX670 (24.0)	Comet TW5050S	5,000	5.0	250 lbs
62	PE-5024HWEGSGEN	Honda Electric Start GX670 (24.0)	General TSP1819	5,000	5.0	250 lbs
63	PE-3024HWEGSCOM	Honda Electric Start GX670 (24.0)	Comet TW8030	3,000	8.0	250 lbs.
64	PE-2524HWEGSCOM	Honda Electric Start GX670 (24.0)	Comet TW10025	2,500	10.0	250 lbs.

***Battery may not be able to ship with all carriers.

Feature	Feature	Feature
• 24,000-25,000 Cleaning units	• Industrial 5,000 PSI Spray Gun	• 50' Steel Braided Hose
• Thermal Relief Valve Protects the Pump from Overheating	• Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle	• Comes wrapped & strapped on a pallet
• Safety Relief Valve	• 36" Insulated Lance	• Electric Start

Replacement Pumps Below Include the Gearbox!



Comet
TW5050S
85.149.059GB



Comet
TW8030
85.149.062GB



Comet
TW10025
85.149.064GB



General
TSP1819
85.139.028GB



Powered by a commercial grade Honda GX engine with steel gas tank and oil alert engine.




Powered by **HONDA** ENGINES

Industrial triplex pump with oil sight glass, oil drain plug, adjustable unloader.

Compact frame designed for easy carrying and transport.

Durable Steel Frame with solid welded anti-vibration rubber foot.

Comes with a 50 foot steel wire braided hose.

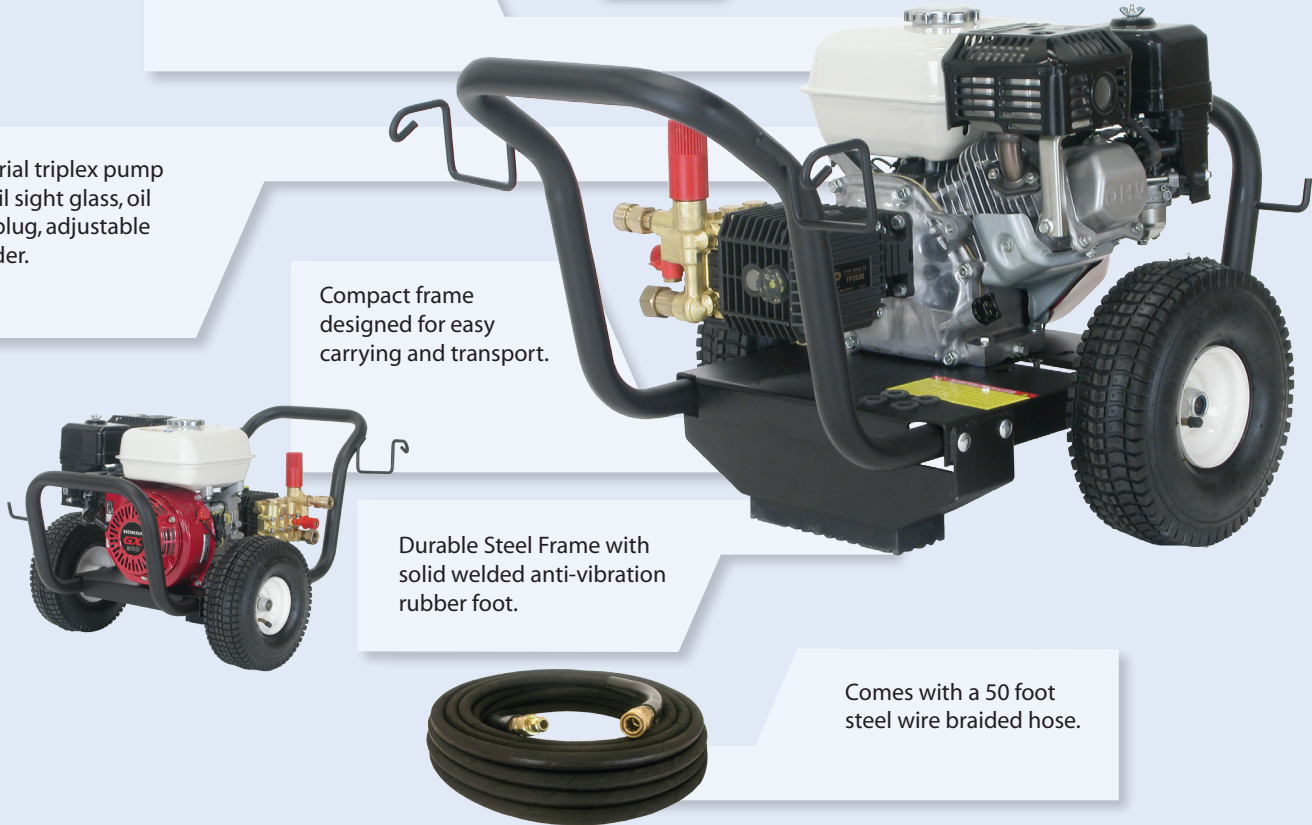

#	Model#	Engine	Pump	Unloader	PSI	GPM	Weight
65	X-2055HWCOMR	Honda GX160 (5.5)	Comet LWD-K3020	Built In	2,000	3.0	105 lbs
66	X-2055HWGENR MODEL SHOWN	Honda GX160 (5.5)	General TP-2530	Built In	2,000	3.0	105 lbs
67	X-2565HWCOMR	Honda GX200 (6.5)	Comet LWD-K3025	Built In	2,500	3.0	105 lbs
68	X-2565HWGENR	Honda GX200 (6.5)	General TP-2530	Built In	2,500	3.0	105 lbs

Additional Features

- 6,000 - 7,500 Cleaning Units
- Thermal Relief Valve Protects the Pump from Overheating
- Solid Welded Steel Foot
- Heavy-Duty Steel Frame
- Low Pressure Chemical Injector
- Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle
- 50' steel wire braided hose
- 2mm Thick Handle & Bumper
- 36" Insulated Lance
- Industrial 5,000 PSI spray gun
- 10" tubed pneumatic tires

See the Stainless Steel version listed on page 16!



Comet LWD-K3020G
85.149.009B



General TP-2530
85.139.020B



Comet LWD-K3025G
85.149.015B





Powered by a commercial grade Honda GX270 or GX390 engine with steel gas tank and oil alert.




Powered by **HONDA** ENGINES



Industrial triplex pump with oil sight glass, oil drain plug, EZ Start adjustable unloader, and external bypass.



Clear bowl water filter for easy inspection.



EZ Grip quick connect coupler.




New Optional Hose Reel Kit 85.402.001K. Use mounting bracket 85.402.012 to fit to frame. *See Page 137 for details.



HEAVY DUTY FRAME

What makes this frame heavy duty?

- Anti-vibration rubber foot
- 2mm thick tubing on handle and bumper
- Solid welded steel foot
- Threaded axle and bolted on tires



#	Model#	Engine	Pump	PSI	GPM	Weight
69	X-3009HWCOMZR	Honda GX270 (9.0)	Comet ZWD3030	3,000	3.0	150 lbs
70	X-4013HWPCOMZR MODEL SHOWN	Honda GX390 (13.0)	Comet ZWD4040G	4,000	4.0	160 lbs
71	X-4013HWPGENR	Honda GX390 (13.0)	General EZ4040	4,000	4.0	160 lbs

Additional Features		
• 9,000-16,000 Cleaning Units	• Low Pressure Chemical Injector	• 36" Insulated Lance
• Thermal Relief Valve Protects the Pump from Overheating	• Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle	• Industrial 5,000 PSI spray gun
• Safety Relief Valve*	• 50' steel wire braided hose	• 13" tubed pneumatic tires

* Only on X-4013HWPCOMZR & X-4013HWPGENR.

See the Stainless Steel version listed on page 18!


Comet ZWD4040G
85.149.022B



General EZ4040
85.139.021B



Comet ZWD3030G
85.149.011B





COOLDRIVE



Industrial triplex pump with oil sight glass, oil drain plug, adjustable unloader and external bypass system.



Powered by **HONDA** ENGINES




Powered by a commercial grade Honda GX200 engine with steel gas tank and oil alert engine.




QUICK REMOVE COVER. Steel belt guard removes easily in 20 seconds with 1 hand-tightening knob. No tools are required.

Industrial black powder-coated frame with chrome handle, pneumatic tires, and solid welded anti-vibration rubber foot.



COOLER PUMP. Cool air is propelled over the pump, reducing the heat by 25%. AIR VENTS. Cool air is drawn into the unit through the outer air vents.



PULLEY SYSTEM. Laser aligned patented pulley fanning system creates cooling air flow and helps prevent belt slippage.


#	Model#	Engine	Pump	PSI	GPM	Weight
72	CD-2565HWB COM MODEL SHOWN	Honda GX200 Oil Alert (6.5)	Comet LWS3025	2,500	3.0	122 lbs

Additional Features

- 7,500 Cleaning Units
- Thermal Relief Valve Protects the Pump from Overheating
- Low Pressure Chemical Injector
- Clear bowl filter for easy inspection
- 5,000 PSI spray gun
- Quick Connect tips in 0°, 15°, 40°, and soap nozzle
- 36" Insulated Lance with Molded Grip
- 10" Pneumatic Tires
- 50' steel wire braided hose
- Patented Cooldrive technology

See the Stainless Steel version listed on page 20!

Comet LWS3025
85.149.065B






COOLDRIVE

Xstream
COMMERCIAL PRESSURE WASHERS



Powered by a commercial grade Honda GX390 engine with steel gas tank and oil alert engine.


Powered by
HONDA
ENGINES




Industrial triplex pump with oil sight glass, oil drain plug, and EZ Start adjustable unloader.



QUICK REMOVE COVER. Steel belt guard removes easily in 20 seconds with 3 hand-tightening knobs. No tools are required.



COOLER PUMP. Cool air is propelled over the pump, reducing the heat by 25%. **AIR VENTS.** Cool air is drawn into the unit through the outer air vents.



PULLEY SYSTEM. Laser aligned patented pulley fanning system creates cooling air flow and helps prevent slippage.

Industrial black powder-coated steel frame with chrome handle, bolt on foam-filled tires, aluminum mags, and solid welded anti-vibration rubber foot.



New Optional Hose Reel Kit 85.402.001K.

Use mounting bracket 85.402.011 to fit to frame. *See Page 137 for details.



#	Model#	Engine	Pump	PSI	GPM	Weight
73	X-4013HWBCOMCD	MODEL SHOWN Honda GX390 Oil Alert (13.0)	Comet HW3540	4,000	3.5	210 lbs
74	X-3513HWBGENCD	Honda GX390 Oil Alert (13.0)	General TS1511	3,500	4.0	210 lbs

Additional Features		
• 14,000 Cleaning Units	• Low Pressure Chemical Injector	• Clear bowl filter for easy inspection
• Thermal Relief Valve Protects the Pump from Overheating	• Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle	• 50' steel wire braided, non-marking hose
• Safety Relief Valve	• 36" Insulated Lance with Molded Grip	• Patented Cooldrive technology
• Adjustable Unloader	• Industrial 5,000 PSI spray gun.	

See the Stainless Steel version listed on page 21!

Comet HW3540S
85.149.031AB



General TS1511
85.139.005AB

