



BLACK POWDER COATED FRAME



Powered by an industrial 1.5HP Baldor Electric Motor.



Commercial axial or industrial triplex pump with oil sight glass, oil drain plug, and adjustable unloader.



New Optional Hose Reel Kit 85.402.001K. Use mounting bracket 85.402.011 to fit to frame. *See Page 137 for details.



CSA APPROVED UNITS INCLUDE A 15AMP GFCI (GROUND FAULT CIRCUIT INTERRUPTER) 23 FT. 12 GAUGE CORD



Some models come CSA Approved

#	Model#	Approval	Motor	Amps**	Pump	PSI	GPM	Weight
75	PE-1115EW1COM <small>MODEL SHOWN</small>	CSA Approved	1.5HP (1 phase) 110V	13.7	Comet LWD-K2020E	1,100	2.0	95 lbs
76	PE-1115EW1COMX*	CSA Approved	1.5HP (1 phase) 110V	13.7	Comet BXD2020E*	1,100	2.0	95 lbs
77	PE-1115EW1CAT	CSA Approved	1.5HP (1 phase) 110V	13.7	Cat2DX20E	1,100	2.0	95 lbs
78	PE-1115EW1COME		1.5HP (1 phase) 110V	13.7	Comet LWD-K2020E	1,100	2.0	95 lbs
79	PE-1115EW1COMXE*		1.5HP (1 phase) 110V	13.7	Comet BXD2020E*	1,100	2.0	95 lbs

*Model delivered with new BXD pump.

**Amperage ratings are approximate and will vary depending on the power supply.

Additional Features

- 2,200 Cleaning Units
- Powder coated steel frame with anti-vibration rubber foot
- 25' steel wire braided hose
- 10" tubed pneumatic tires
- Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle
- Anti-Vibration Rubber Foot
- Industrial 5,000 PSI spray gun
- Switch, Cord & Plug Included


Comet BXD2020E
85.149.088B



Comet LWD-K2020E
85.149.021B



Cat 2DX20E
85.119.019B





BLACK POWDER COATED FRAME



Powered by an industrial 2.0 HP Baldor Electric Motor.



Commercial axial or industrial triplex pump with oil sight glass, oil drain plug, and adjustable unloader.



New Optional Hose Reel Kit 85.402.001K.
Use mounting bracket 85.402.011 to fit to frame.
*See Page 137 for details.



CSA APPROVED UNITS INCLUDE A 20AMP GFCI (GROUND FAULT CIRCUIT INTERRUPTER) 23 FT. 12 GAUGE CORD



Some models come CSA Approved

#	Model#	Approval	Motor	Amps**	Pump	PSI	GPM	Weight
80	PE-1520EW1COM	CSA Approved	2.0 HP (1 phase) 110V	17.3	Comet LWD-K2020E	1,500	2.0	100 lbs
81	PE-1520EW1COMX* MODEL SHOWN	CSA Approved	2.0 HP (1 phase) 110V	17.3	Comet BXD2020E*	1,500	2.0	100 lbs
82	PE-1520EW1CAT	CSA Approved	2.0 HP (1 phase) 110V	17.3	Cat2DX20E	1,500	2.0	100 lbs
83	PE-1520EW1COME		2.0 HP (1 phase) 110V	17.3	Comet LWD-K2020E	1,500	2.0	100 lbs
84	PE-1520EW1COMXE*		2.0 HP (1 phase) 110V	17.3	Comet BXD2020E*	1,500	2.0	100 lbs

*Model delivered with new BXD pump.

**Amperage ratings are approximate and will vary depending on the power supply.

Additional Features		
• 3,000 Cleaning Units	• 10" tubed pneumatic tires	• Industrial spray gun
• Powder coated steel frame with anti-vibration rubber foot	• Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle	• Switch, Cord & Plug Included
• 25' steel wire braided hose	• Anti-Vibration Rubber Foot	


Comet BXD2020E
85.149.088B



Comet LWD-K2020E
85.149.021B



Cat 2DX20E
85.119.019B





BLACK POWDER COATED FRAME

BALDOR
MOTORS AND DRIVES



Powered by an industrial Baldor Electric Motor.

Industrial triplex pump with oil sight glass, oil drain plug, and adjustable unloader.

DOES NOT INCLUDE SWITCH, CORD & PLUG (EXCEPT PE-2030EW1COM)

Redesigned powder coated steel frame has 3 lbs more bulk. Comes with anti-vibration rubber foot.



New Optional Hose Reel Kit 85.402.001K.
Use mounting bracket 85.402.013 to fit to frame.
*See Page 137 for details.




#	Model#	Motor	Amperage**	Pump	PSI	GPM	Weight
85	PE-2030EW1COM*	3.0 HP (1 phase) 220V	12 Amps	Comet LWD-K2020E	2,000	2.2	135 lbs
86	PE-2050EW1COM	5.0 HP (1 phase) 220V	23 Amps	Comet FWS3530E	2,000	3.5	200 lbs
87	PE-2050EW3COM	5.0 HP (3 phase) 575V	5.2 Amps	Comet FWS3530E	2,000	3.5	200 lbs
88	PE-2775EW1COM	7.5 HP (1 phase) 220V	32 Amps MODEL SHOWN	Comet FWS3530E	2,700	3.5	230 lbs
89	PE-2775EW3COM	7.5 HP (3 phase) 575V	8 Amps	Comet FWS3530E	2,700	3.5	230 lbs
90	PE-3010EW3COM	10 HP (3 phase) 575V	11.2 Amps	Comet FWS4030E	3,000	4.0	230 lbs
91	PE-2050EW3COM4	5.0 HP (3 phase) 220/460V	6.5A (460V) /13.2A (220V)	Comet FWS3530E	2,000	3.5	200 lbs
92	PE-2775EW3COM4	7.5 HP (3 phase) 220/460V	10A (460V) /20A (220V)	Comet FWS3530E	2,700	3.5	230 lbs
93	PE-3010EW3COM4	10 HP (3 phase) 220/460V	14A (460V) /26A (220V)	Comet FWS4030E	3,000	4.0	230 lbs

**Amperage ratings are approximate and will vary depending on the power supply.

Additional Features

- 4,400 - 12,000 Cleaning Units
- Industrial 5,000 PSI spray gun
- Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle
- Low Pressure Chemical Injector
- 50' steel wire braided hose
- 13" Tubed Pneumatic Tires

* **Does not include Cord, Switch or Plug (except PE-2030EW1COM)**





BLACK POWDER COATED FRAME



Powered by an industrial 1.5 or 2.0 HP Baldor Electric Motor.

Commercial axial or industrial triplex pump with oil sight glass, oil drain plug, and adjustable unloader.



1.5HP, CSA APPROVED UNITS INCLUDE A 15AMP GFCI (GROUND FAULT CIRCUIT INTERRUPTER) 23 FT. 12 GAUGE CORD



2.0HP, CSA APPROVED UNITS INCLUDE A 20AMP GFCI (GROUND FAULT CIRCUIT INTERRUPTER) 23 FT. 12 GAUGE CORD


#	Model#	Motor	Amps**	Pump	PSI	GPM	Weight
94	PE-1115EP1COM	1.5HP (1 phase) 110V	13.7	Comet LWD-K2020E	1,100	2.0	80 lbs
95	PE-1115EP1COMX*	1.5HP (1 phase) 110V	13.7	Comet BXD2020E*	1,100	2.0	80 lbs
96	PE-1520EP1COM MODEL SHOWN	2.0 HP (1 phase) 110V	17.3	Comet LWD-K2020E	1,500	2.0	85 lbs
97	PE-1520EP1COMX*	2.0 HP (1 phase) 110V	17.3	Comet BXD2020E*	1,500	2.0	85 lbs

*Model delivered with new BXD pump.



**Amperage ratings are approximate and will vary depending on the power supply.

Additional Features		
• 2,200 to 3,000 Cleaning Units	• Switch, Cord & Plug Included	• 25' steel wire braided hose
• Powder coated steel frame with anti-vibration rubber feet	• Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle	• Industrial spray gun

Comet BXD2020E
85.149.088B



Comet LWD-K2020E
85.149.021B





BLACK POWDER COATED FRAME

Example of Pack-A-Round mounted to a wall.



BALDOR
MOTORS AND DRIVES


Powered by an industrial 2.0 HP Baldor Electric Motor.



Industrial triplex pump with oil sight glass, oil drain plug, and adjustable unloader.

Unit starts automatically when trigger is pulled, and shuts down automatically when trigger is released.

AUTO ON/OFF FEATURE

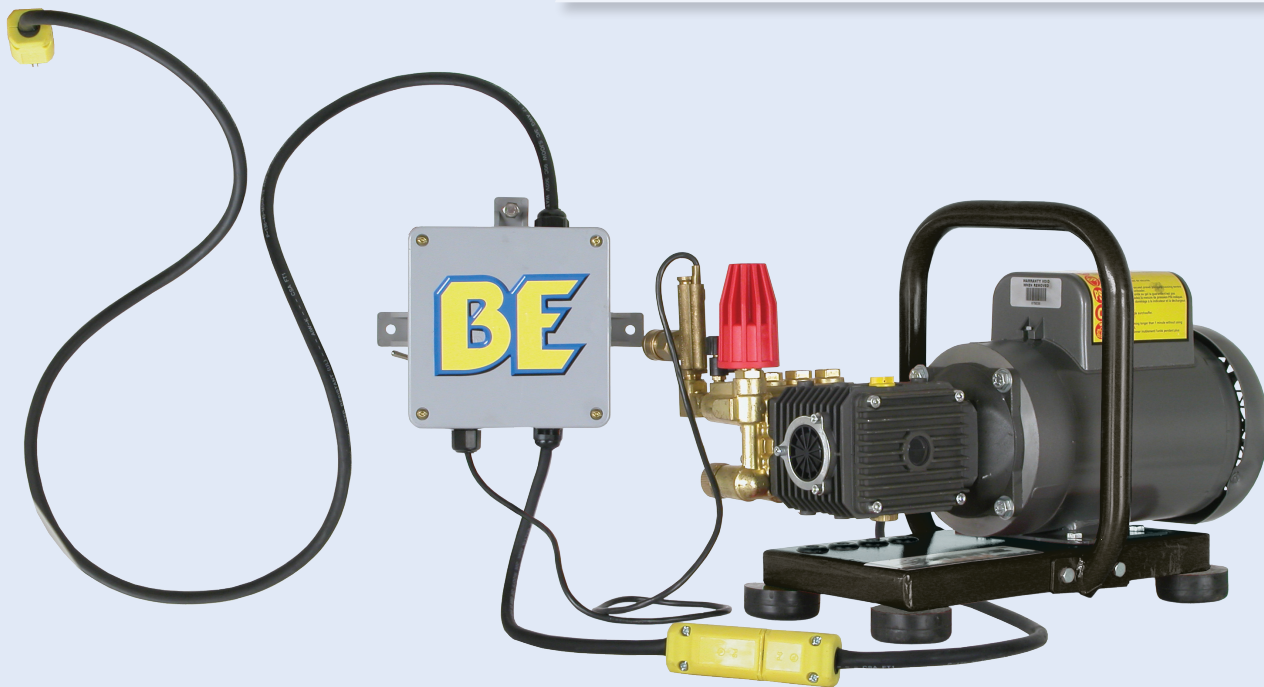

#	Model#	Motor	Amps**	Pump	PSI	GPM	Weight
98	PE-1520EP1COMH	MODEL SHOWN 2.0 HP (1 phase) 110V	17.3	Comet LWD-K2020E	1,500	2.0	80 lbs

**Amperage ratings are approximate and will vary depending on the power supply.

Additional Features

- 3,000 Cleaning Units
- Low Pressure Chemical Injector
- 36" Insulated Lance
- Industrial 5,000 PSI spray gun
- Auto switch box with flow switch
- 25' steel wire braided hose
- Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle

Comet LWD-K2020E
85.149.021B

