

SECTION 2

SPECIALTY CLEANING UNITS

WATER BROOMS

Large Water Broom	50
Small Water Broom	50

FLAT SURFACE CLEANERS

<i>New Vacuum Whirl-A-Way</i>	52
-------------------------------	----

POLYPROPYLENE

12" Multi-Use Whirl-A-Way	54
16" Whirl-A-Way	55
18" Whirl-A-Way	56
20" Whirl-A-Way	57

ABS & NYLON WITH QUICK CASTOR

22" Whirl-A-Way	58
-----------------	----

STAINLESS STEEL

20" Whirl-A-Way	59
24" Whirl-A-Way	60

TELESCOPING WANDS

4 Stage Fiberglass	66
Fiberglass	67
Aluminum	69
Telescoping Wand Accessories	70
Telescoping Painting Pole	71





PACKAGING: Packaged



The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using a water broom or a standard spray nozzle.

Unit	Time to clean
▶ Water Broom	30 Minutes
Spray Nozzle	80 Minutes

WATER BROOM, SMALL

Used for cleaning vast surfaces quickly. Comes in a bubble pack ready for display.



Part#	85.400.060
Max Pressure	4,000 PSI
Max Flow	3 GPM
Width	12"
Connection	1/4" Quick-Disconnect plug
Nozzles	3
Replacement Nozzles	85.265.013
Weight	3.5 lbs

WATER BROOM, LARGE

Used for cleaning vast surfaces quickly. Comes boxed and ready for display.



Part#	85.400.061
Max Pressure	4,000 PSI
Max Flow	4 GPM
Width	16"
Connection	1/4" Quick-Disconnect plug
Nozzles	4
Replacement Nozzles	85.265.013
Weight	4.5 lbs





Semi-Professional, Commercial, & Industrial Use WHIRL-A-WAYS

SEMI-PROFESSIONAL WHIRL-A-WAY'S



12 INCH WHIRL-A-WAY

The Multi-Use Whirl-A-Way is a versatile cleaner and can be used for a variety of cleaning applications.

- Use with an optional spray gun kit
- Attach to a longwand
- Attach to a spray lance

FOR MORE INFO SEE PAGE 54



16 INCH WHIRL-A-WAY

- Two rotary cleaning arms
- Hover action ideal for cleaning rooftops and rough surfaces
- Easy to handle frame is designed for less operator fatigue
- Helps eliminate zebra striping

FOR MORE INFO SEE PAGE 55

COMMERCIAL USE WHIRL-A-WAY'S

18 INCH WHIRL-A-WAY

- Two rotary cleaning arms
- Comes with castors ideal for cleaning driveways and other large flat surfaces
- Easy to handle frame is designed for less operator fatigue
- Helps eliminate zebra striping

FOR MORE INFO SEE PAGE 56



20 INCH WHIRL-A-WAY

- Two rotary cleaning arms
- Hover action ideal for cleaning rooftops and rough surfaces
- Easy to handle frame is designed for less operator fatigue
- Helps eliminate zebra striping

FOR MORE INFO SEE PAGE 57

INDUSTRIAL USE WHIRL-A-WAY'S

22 INCH WHIRL-A-WAY

- Two rotary cleaning arms
- Comes with removable castors for increased versatility
- Works well for cleaning large flat surfaces as well as rough surfaces
- Easy to handle frame is designed for less operator fatigue
- Helps eliminate zebra striping

FOR MORE INFO SEE PAGE 58



STAINLESS STEEL

20 & 24 INCH WHIRL-A-WAY

- Three rotary cleaning arms
- Comes with castors ideal for cleaning driveways and other large flat surfaces
- Stainless Steel design for maximum cleaning durability
- Easy to handle frame is designed for less operator fatigue
- Helps eliminate zebra striping

FOR MORE INFO SEE PAGES 59 & 60

**Introducing the new
20" Vacuum Whirl-A-Way!**

THE FUTURE OF FLAT SURFACE CLEANING IS HERE!

- **Reclaim Cleaning Water**
 - **Work Indoors**
- **Deal with Waste Water Responsibly**

Coming Spring 2008!








12" MULTI-USE WHIRL-A-WAY

SEMI-PROFESSIONAL WHIRL-A-WAY'S

The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using 3 different components.

Unit	Time to clean
Whirl-A-Way	10 Minutes
Water Broom	30 Minutes
Spray Nozzle	80 Minutes

Attach to a longwand and clean hard to reach surfaces.



Attach to a gun and lance for cleaning flat surfaces.



Use a high pressure spray gun kit to clean walls.*



4,000 PSI Rotary Head
180° F

Durable Nylon Brush Skirt & Heavy Duty Polypropylene Cover.



Welded Steel Two Arm Rotary Bar.

Zero Wall Clearance.


Part#	Optional Kits
85.400.066	Spray Gun Kit

Kit complete with spray gun and handle.



Model#	Max Pressure	Optimal Pressure	Max Flow	Max Temp.	Size	Weight
BE-1200WAW	4,000 PSI	Under 2,500 PSI	8.0 GPM	180°F	12"	5.6 lbs

* Gun kit sold separately.





16" WHIRL-A-WAY, HEAVY DUTY COMPOSITE


SEMI-PROFESSIONAL WHIRL-A-WAY'S

UP TO 180°F
HOT
COLD

Hover action is ideal for rooftop cleaning applications.




Easy to handle frame is designed for less operator fatigue.



Welded Steel Two Arm Rotary Bar.


Heavy Duty Polypropylene Cover



Welded Elbows and Assembly

Durable Nylon Brush Skirt

Zero Wall Clearance & Water Flow Out Front Eliminates Water Build Up

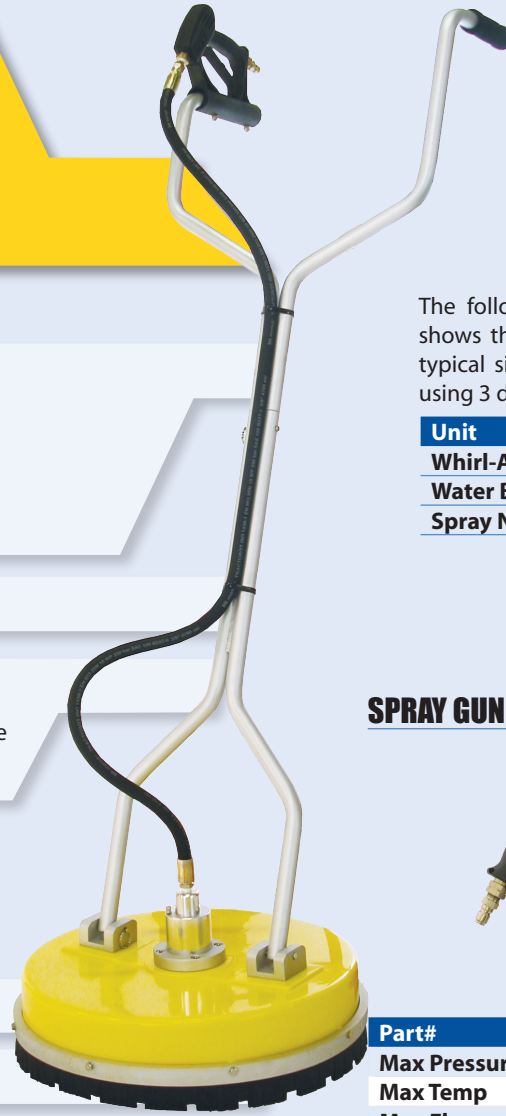

The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using 3 different components.


Unit	Time to clean
Whirl-A-Way	10 Minutes
Water Broom	30 Minutes
Spray Nozzle	80 Minutes

SPRAY GUN



Part#	85.202.017
Max Pressure	4,000 PSI
Max Temp	180 °F
Max Flow	8 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	1.3 lbs

Model#	Max Pressure	Max Flow	Max Temp.	Size	Weight
BE-1600WAW	4,000 PSI	8.0 GPM	180°F	16" diameter	26 lbs.





18" WHIRL-A-WAY, HEAVY DUTY COMPOSITE

COMMERCIAL USE WHIRL-A-WAY'S

UP TO 180°F



Whirl-A-Ways with castors are ideal for cleaning driveways



Easy to handle frame is designed for less operator fatigue



Welded Steel Two Arm Rotary Bar.

Heavy Duty Polypropylene Cover



Welded Elbows and Assembly

Greasable Casters



4,000 PSI Rotary Head 180° F

Zero Wall Clearance & Water Flow Out Front Eliminates Water Build Up

The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using 3 different components.


Unit	Time to clean
Whirl-A-Way	10 Minutes
Water Broom	30 Minutes
Spray Nozzle	80 Minutes

SPRAY GUN



Part#	85.202.115
Max Pressure	4,000 PSI
Max Temp	180 °F
Max Flow	8 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	1.3 lbs

Model#	Max Pressure	Max Flow	Max Temp.	Size	Weight
BE-1800WAW	4,000 PSI	8.0 GPM	180°F	18" diameter	32 lbs.





20" WHIRL-A-WAY, HEAVY DUTY COMPOSITE

COMMERCIAL USE WHIRL-A-WAY'S

UP TO 180°F




Hover action is ideal for rooftop cleaning applications.



Easy to handle frame is designed for less operator fatigue



Welded Steel Two Arm Rotary Bar.




Welded Elbows and Assembly

Heavy Duty Polypropylene Cover

Durable Nylon Brush Skirt

Zero Wall Clearance & Water Flow Out Front Eliminates Water Build Up

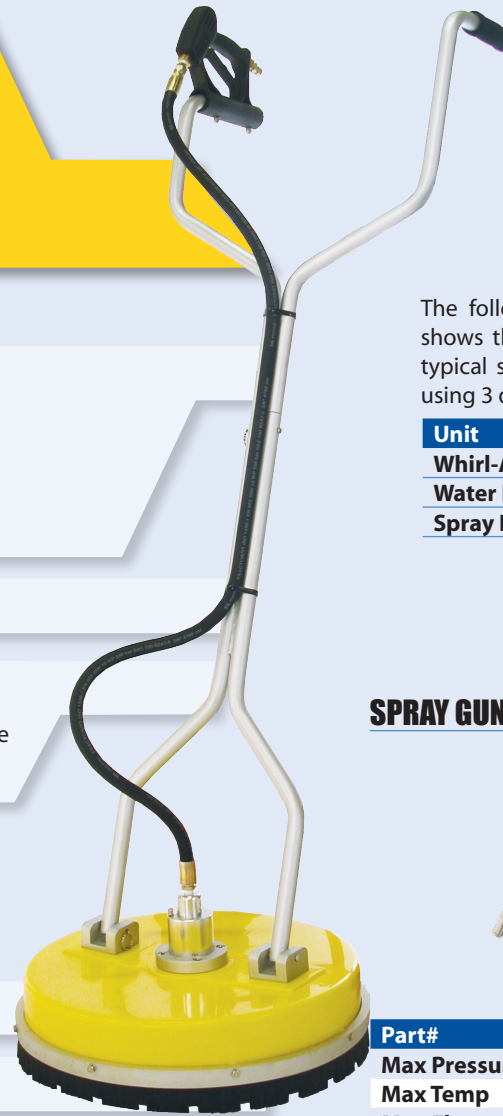

The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using 3 different components.


Unit	Time to clean
Whirl-A-Way	10 Minutes
Water Broom	30 Minutes
Spray Nozzle	80 Minutes

SPRAY GUN



Part#	85.202.115
Max Pressure	4,000 PSI
Max Temp	180 °F
Max Flow	8 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	1.3 lbs

Model#	Max Pressure	Max Flow	Max Temp.	Size	Weight
BE-2000WAWY	4,000 PSI	8.0 GPM	180°F	20" diameter	32 lbs.





22" WHIRL-A-WAY, HEAVY DUTY COMPOSITE

COMMERCIAL USE WHIRL-A-WAY'S

UP TO 180°F



Add the castors for cleaning driveways.



Easy removal of castors for cleaning rooftops.



Threaded gun allows for quick removal and easy field repair.



Easy to handle frame is designed for less operator fatigue

The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using 3 different components.

Unit	Time to clean
Whirl-A-Way	10 Minutes
Water Broom	30 Minutes
Spray Nozzle	80 Minutes



Welded steel two arm rotary bar with welded elbows and assembly.

THREADED SPRAY GUN

Replacement spray gun for the BE-2200WAWG and the Aluminum long wands



Tough ABS & Nylon Cover for maximum durability.




4,000 PSI, 180° F, Greasable Rotary Head

Zero Wall Clearance & Water Flow Out Front Eliminates Water Build Up

REPAIR KITS	Part#
Repair kit	85.201.005

Part#	85.202.116
Max Pressure	4,000 PSI
Max Temp	180° F
Max Flow	10 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	2.12 lbs

Patented Non-Marking removable castors designed for maximum cleaning versatility.



Model#	Max Pressure	Max Flow	Max Temp.	Size	Weight
BE-2200WAWG	4,000 PSI	8.0 GPM	180°F	22" diameter	38 lbs.



20" WHIRL-A-WAY, STAINLESS STEEL

INDUSTRIAL USE WHIRL-A-WAY'S

STAINLESS STEEL

UP TO 180°F
HOT
COLD

Comes with castors ideal for cleaning large flat surfaces



Easy to handle frame is designed for less operator fatigue



Welded steel three Arm Rotary bar with welded elbows and assembly.

Zero Wall Clearance

Non-Marking castors



4,000 PSI Rotary Head 180° F



The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using 3 different components.


Unit	Time to clean
Whirl-A-Way	10 Minutes
Water Broom	30 Minutes
Spray Nozzle	80 Minutes

SPRAY GUN



Part#	85.202.115
Max Pressure	4,000 PSI
Max Temp	180 °F
Max Flow	8 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	1.3 lbs

Model#	Max Pressure	Max Flow	Max Temp.	Size	Weight
BE-2000WAWS	4,000 PSI	8.0 GPM	180°F	20" diameter	38 lbs.





24" WHIRL-A-WAY, STAINLESS STEEL

INDUSTRIAL USE WHIRL-A-WAY'S

UP TO 180°F



Comes with castors ideal for cleaning large flat surfaces



STAINLESS STEEL



Easy to handle frame is designed for less operator fatigue



Welded steel three arm rotary bar with a welded elbows and assembly.

The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using 3 different components.

Unit	Time to clean
Whirl-A-Way	10 Minutes
Water Broom	30 Minutes
Spray Nozzle	80 Minutes

Zero Wall Clearance

Non-Marking castors




4,000 PSI Rotary Head 180° F

SPRAY GUN



Part#	85.202.115
Max Pressure	4,000 PSI
Max Temp	180 °F
Max Flow	8 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	1.3 lbs

Model#		Max Pressure	Max Flow	Max Temp.	Size	Weight
BE-2400WAWS	MODEL SHOWN	4,000 PSI	8.0 GPM	180°F	24" diameter	45 lbs.






BALL VALVE KIT, BE-1200WAW, & BE-1600WAW BREAKDOWNS


BALL VALVE KIT

Allows you to switch between Whirl-A-Way and Wand without having to shutdown the unit.

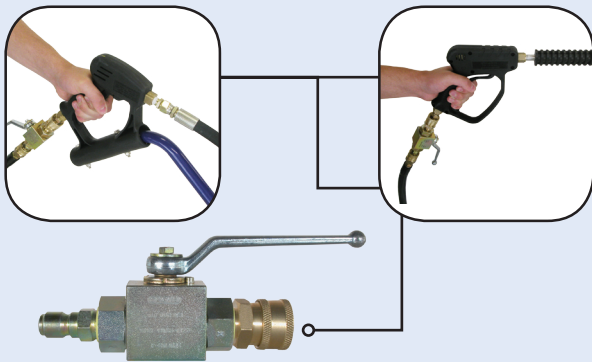


Part#	85.300.044
Max Pressure	4,000 PSI
Max Temperature	180 °F
Outlet	3/8" Quick Connect Plug
Inlet	3/8" Quick Connect Coupler
Weight	2.28 lbs

REPLACEMENT PARTS, BE-1200WAW

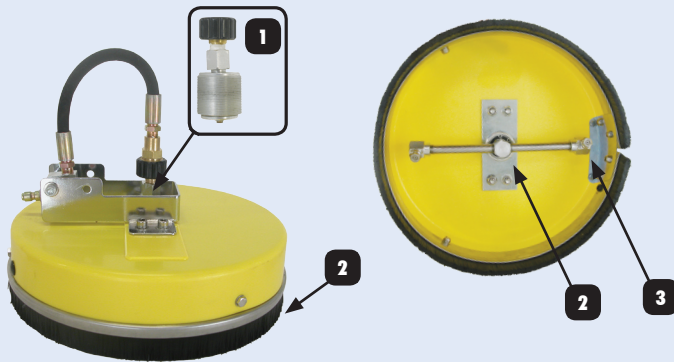

#	Part#	Replacement Part
1	85.790.021	Rotary Head
	85.790.022	Rotary Head Repair Kit
2	85.791.016	Rotary Arm
	85.215.020	Replacement Nozzle Tip - 020 Orifice
4	85.790.024	Nylon Brush Skirt - 12"

REPLACEMENT PARTS, BE-1600WAW

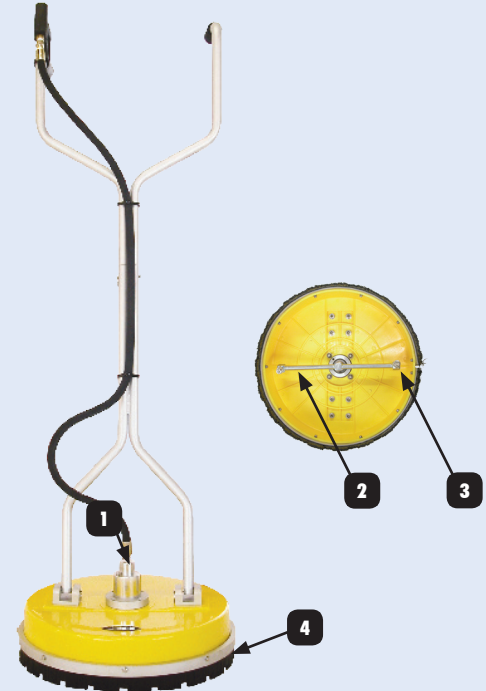

#	Part#	Replacement Part
1	85.790.004	Rotary Head
	85.790.010	Rotary Head Repair Kit
2	85.791.009	Rotary Arm - 16" 2 Arm
3	85.225.025	Replacement Nozzle Tip - 025 Orifice
4	85.790.012	Nylon Brush Skirt - 16"

SPRAY GUN, BE-1600WAW




Part#	85.202.017
Max Pressure	4,000 PSI
Max Temperature	180 °F
Max Flow	8 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	1.35 lbs




BE-1800WAW & BE-2000WAWY BREAKDOWNS

REPLACEMENT PARTS, BE-1800WAW

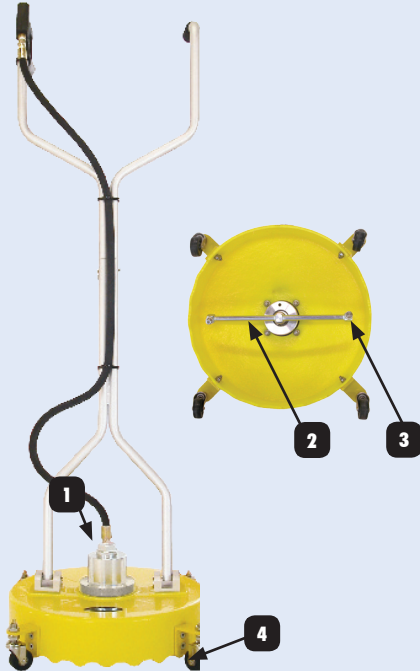

#	Part#	Replacement Part
1	85.790.006	Rotary Head
	85.790.010	Rotary Head Repair Kit
2	85.791.007	Rotary Arm - 2 Arm for 18"
3	85.225.025	Replacement Nozzle Tip - 025 Orifice
4	85.790.007	1" Caster Wheels

REPLACEMENT PARTS, BE-2000WAWY

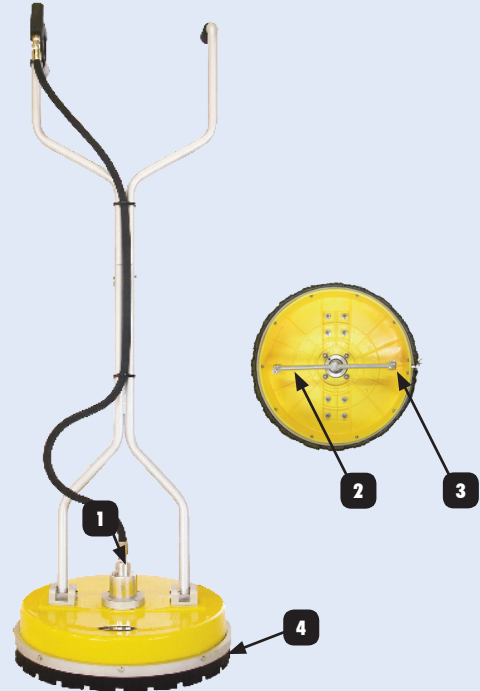


#	Part#	Replacement Part
1	85.790.004	Rotary Head
	85.790.010	Rotary Head Repair Kit
2	85.791.013	Rotary Arm - 2 Arm for 20"
3	85.225.025	Replacement Nozzle Tip - 025 Orifice
4	85.790.014	Nylon Brush Skirt

SPRAY GUN, BE-1800WAW & BE-200WAWY



Part#	85.202.115
Max Pressure	4,000 PSI
Max Temperature	180 °F
Max Flow	8 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	1.3 lbs


WHIRL-A-WAY ROTARY HEAD BREAKDOWN

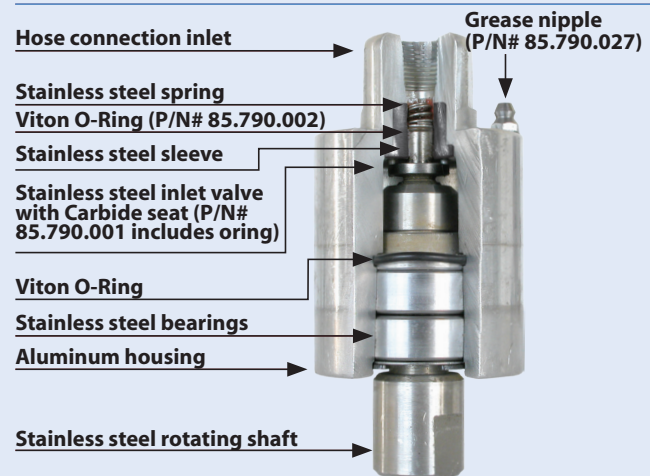




BE-2000AWWS & BE-2400AWWS BREAKDOWNS

REPLACEMENT PARTS, BE-2000AWWS

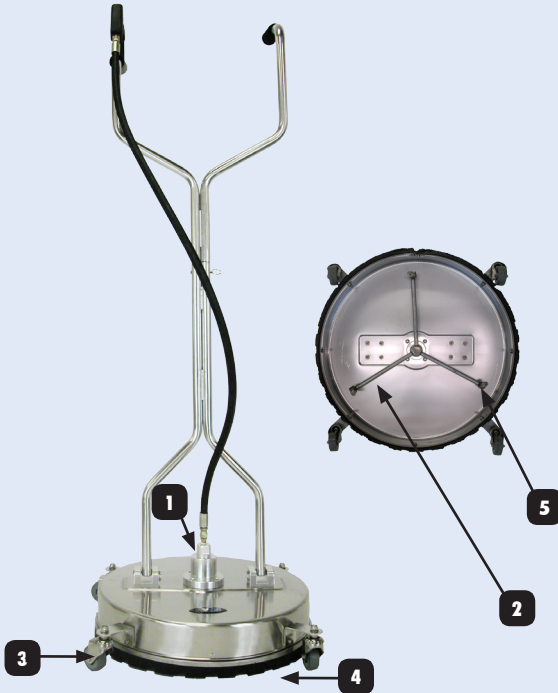

#	Part#	Replacement Part
1	85.790.004	Rotary Head
	85.790.010	Rotary Head Repair Kit
2	85.791.012	Tri-Rotary Arm for 20" SS
3	85.790.009	1" Non Marking Caster
4	85.790.014S	Nylon Brush Skirt 20"
5	85.225.020	Replacement Nozzle Tip - 020 Orifice

REPLACEMENT PARTS, BE-2400AWWS

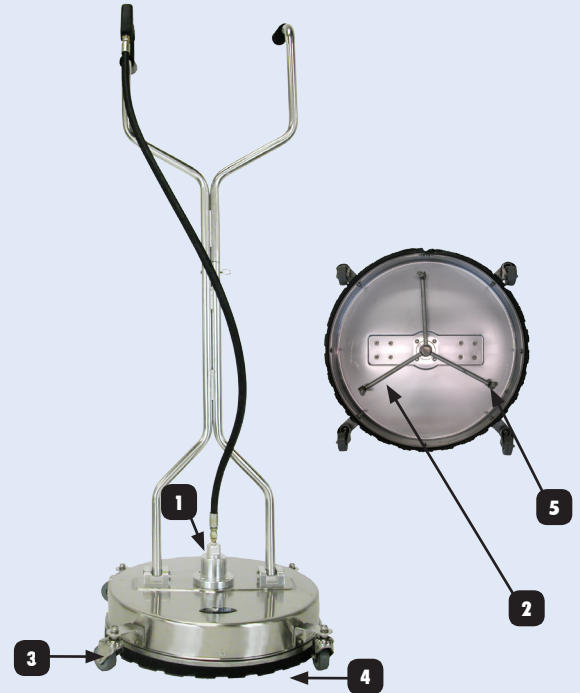


#	Part#	Replacement Part
1	85.790.004	Rotary Head
	85.790.010	Rotary Head Repair Kit
2	85.791.010S	Tri-Rotary Arm - 24" SS
3	85.790.020	1.5" Non Marking Caster
4	85.790.019S	Nylon Brush Skirt - 24" SS WAW
5	85.225.020	Replacement Nozzle Tip - 020 Orifice

SPRAY GUN, BE-2000AWWS & BE-2400AWWS



Part#	85.202.115
Max Pressure	4,000 PSI
Max Temperature	180 °F
Max Flow	8 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	1.3 lbs

WHIRL-A-WAY ROTARY HEAD BREAKDOWN

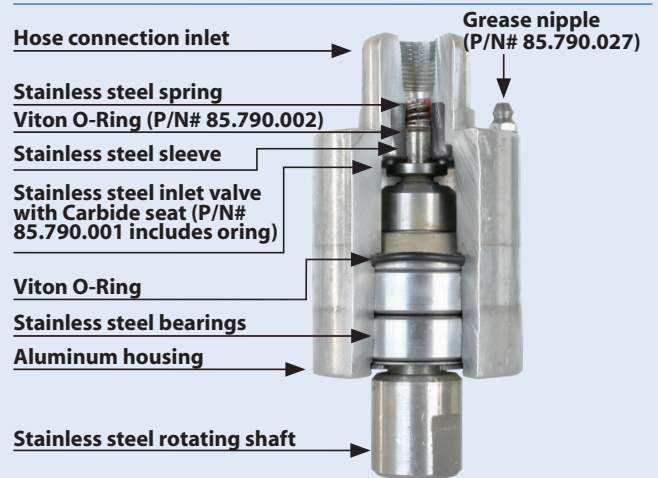



CLEAN HARD TO REACH AREAS WITH A BE TELESCOPING WAND.

**MAKE YOUR JOB EASIER WITH
OPTIONAL ACCESSORIES.**

Part#	Description
BE-1200WAW	12" Whirl-A-Way



Part#	Description
85.210.020	5,100 PSI Rotary Nozzle



Part#	Description
85.400.019	Belt Kit



Part#	Description
85.400.008	Rotating Brush



Part#	Description
85.400.033	Gutter Cleaner Kit





Semi-Professional, Commercial, & Industrial Use TELESCOPING WANDS


SEMI-PROFESSIONAL TELESCOPING WANDS



12/18/24 FT TELESCOPING WAND (FIBERGLASS) - PAGE 66 & 67

- Easily clean rooftops and tough to reach areas with a telescoping wand.
- Threaded gun for quick removal and easy field repair.
- Two aluminum inner poles & fiberglass outer pole for maximum strength.
- Coarse threaded pole lock for a tight grip.
- M22 screw-type connections to easily and securely add accessories.

COMMERCIAL USE TELESCOPING WANDS

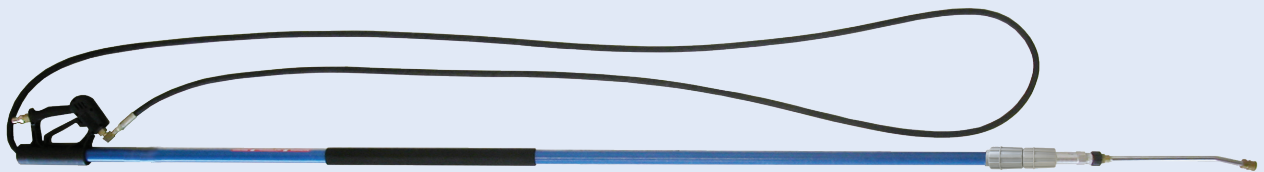

24 FT TELESCOPING WAND (SUPER HEAVY DUTY FIBERGLASS) - PAGE 68

- Easily clean rooftops and tough to reach areas with a telescoping wand.
- Threaded gun for quick removal and easy field repair.
- Two fiberglass outer poles and aluminum inner pole for maximum strength.
- Coarse threaded pole lock for a tight grip.
- M22 screw-type connections to easily and securely add accessories.
- Large 3/8" hose for maximum chemical draw.
- Belt Kit Included.

INDUSTRIAL USE TELESCOPING WANDS



24 FT TELESCOPING WAND (HEAVY DUTY ALUMINUM) - PAGE 69

- Easily clean rooftops and tough to reach areas with a telescoping wand.
- Threaded gun for quick removal and easy field repair.
- Three aluminum poles for maximum strength.
- Pin lock couplers allow you to easily change pole height.
- M22 screw-type connections to easily and securely add accessories.
- Belt Kit Included.

BE *win*

FIBERGLASS, HEAVY DUTY

SEMI-PROFESSIONAL TELESCOPING WANDS

**The new 4 Pole telescoping wand design is easy to use and fits in a smaller box to reduce shipping costs!**

Easily clean rooftops with a telescoping wand.




Threaded gun for quick removal and easy field repair.



Two fiberglass poles and two aluminum poles for maximum strength.



Screw type connection for a solid grip on accessories.



Coarse threaded pole lock for a tight grip.

THREADED LONG WAND SPRAY GUN

Part#	85.202.117
Max Pressure	4,000 PSI
Max Temp	200° F
Max Flow	10 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	2.12 lbs


Part#	Replacement Parts
85.205.104	Small Pole Lock
85.205.105	Large Pole Lock
85.205.108	Extra Large Pole Lock

Model#	Max Pressure	Max Flow	Max Temp.	Length	Hose
85.206.424	4,000 PSI	8 GPM	200°F	6ft. 6" ▶ 24ft.	1/4"




FIBERGLASS, HEAVY DUTY


SEMI-PROFESSIONAL TELESCOPING WANDS

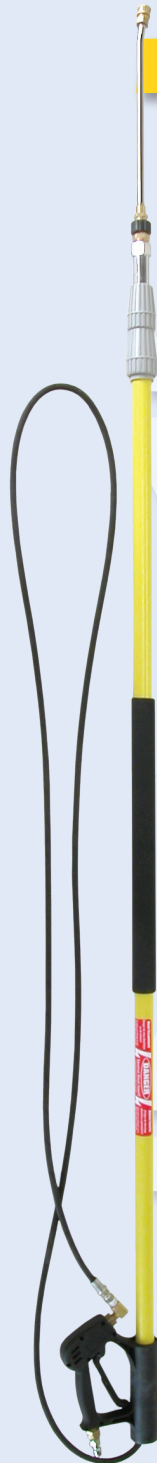

Easily clean rooftops with a telescoping wand.



Threaded gun for quick removal and easy field repair.



Two aluminum poles and fiberglass outer pole for maximum strength.



Screw type connection for a solid grip on accessories.



Coarse threaded pole lock for a tight grip.

THREADED LONG WAND SPRAY GUN



Part#	85.202.114
Max Pressure	4,000 PSI
Max Temp	200° F
Max Flow	10 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	2.12 lbs
Repair Kit	85.201.005


Part#	Replacement Parts
85.205.103	12' Model Pole Lock
85.205.104	Small Pole Lock
85.205.105	Large Pole Lock

Model#	Max Pressure	Max Flow	Max Temp.	Length	Hose	Weight
85.206.012	4,000 PSI	8 GPM	200°F	6ft. 6" ▶ 12ft.	1/4"	7.5 lbs
85.206.018	4,000 PSI	8 GPM	200°F	6ft. 6" ▶ 18ft.	1/4"	8.5 lbs
85.206.024	4,000 PSI	8 GPM	200°F	9ft. ▶ 24ft.	1/4"	10.5 lbs


BE

FIBERGLASS, SUPER HEAVY DUTY

COMMERCIAL USE TELESCOPING WANDS

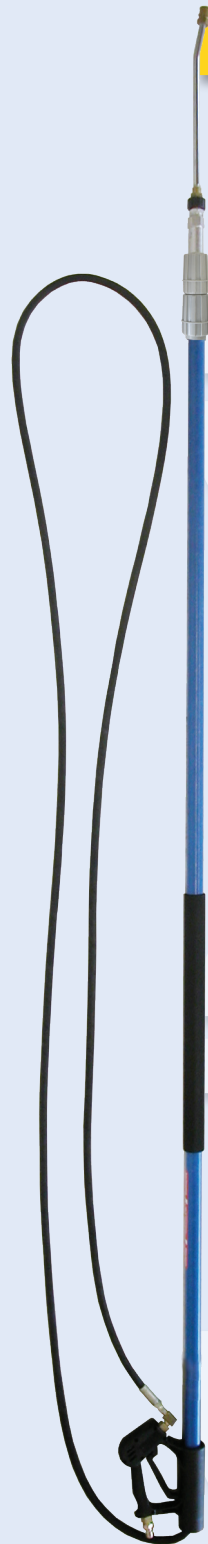

Easily clean rooftops with a telescoping wand.



Threaded gun for quick removal and easy field repair.



Screw type connection for a solid grip on accessories.




Coarse threaded pole lock for a tight grip.



Two fiberglass outer poles and one aluminum inner pole for maximum strength.



Large 3/8" hose for maximum chemical draw.



Lightweight design includes a belt kit which helps reduce operator fatigue.

LONG WAND SPRAY GUN



Part#	85.202.114
Max Pressure	4,000 PSI
Max Temp	200° F
Max Flow	10 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	2.12 lbs
Repair Kit	85.201.005

Part#	Replacement Parts
85.205.104	Small Pole Lock
85.205.105	Large Pole Lock


Model#		Max Pressure	Max Flow	Max Temp.	Length	Hose	Weight
85.206.024SHD	MODEL SHOWN	4,000 PSI	8 GPM	200°F	9ft. ▶ 24ft.	3/8"	16 lbs




ALUMINUM SUPER HEAVY DUTY

INDUSTRIAL USE TELESCOPING WANDS

Easily clean high walls with a telescoping wand.



Threaded gun for quick removal and easy field repair.




Two flat sided aluminum poles retract easily and won't spin during operation.



Screw type connection for a solid grip on accessories.



Easy to use pin lock couplers.



Lightweight design includes a belt kit which helps reduce operator fatigue.

LONG WAND SPRAY GUN



Part#	85.202.116
Max Pressure	4,000 PSI
Max Temp	200° F
Max Flow	10 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	2.12 lbs
Repair Kit	85.201.005

Part#	Replacement Parts
85.205.106	Small Pole Lock
85.205.107	Large Pole Lock

Model#		Max Pressure	Max Flow	Max Temp.	Length	Hose	Weight
85.205.018ALSHD	MODEL SHOWN	4,000 PSI	8 GPM	200°F	6ft. 6" ▶ 18ft.	1/4"	13 lbs
85.205.024ALSHD		4,000 PSI	8 GPM	200°F	9ft. ▶ 24ft.	1/4"	16.5 lbs



GUTTER CLEANER

Turns wands into efficient gutter cleaners so that gutters can be cleaned from the ground. Connects with a quick connect fitting.



Part#	85.400.007
Max Pressure	4,000 PSI
Outlet	1/4" quick connect coupler
Inlet	1/4" plug
Weight	0.55 lbs

GUTTER CLEANER KIT

This gutter pole attaches to the new style BE Long Wand. Held firmly in place by an M22 fitting to prevent the gutter cleaner from spinning during use..



Part#	85.400.033
Max Pressure	4,000 PSI
Outlet	1/4" quick connect coupler
Inlet	Male M22
Weight	0.60 lbs

NYLON BRUSH, ROTATING

Attach to telescoping wand to provide low pressure scrubbing action.



Part#	85.400.008
Max Pressure	2,000 PSI
Max Temperature	140° F
Inlet	1/4" quick connect plug
Weight	1.15 lbs

TELESCOPING WAND, BELT KIT

Used to support Long Wands, taking stress off the arms and body. For use with all Long Wands. Fits any size (adjustable).



Part#	Telescoping Wands
85.400.019	Fits all BE Long Wands



Threaded end attaches to any standard roller paintbrush.

Ideal for exterior and interior painting. Conveniently attaches to any standard roller paintbrush.



Two aluminum poles and fiberglass outer pole for maximum strength.



Coarse threaded pole lock for a tight grip.

Part#	Replacement Parts
85.205.103	12' Model Pole Lock
85.205.104	Small Pole Lock
85.205.105	Large Pole Lock

Model#	Length	Weight
85.205.212	6ft. 6" ▶ 12ft.	4.1 lbs
85.205.218 MODEL SHOWN	6ft. 6" ▶ 18ft.	5.1 lbs
85.205.224	9ft. ▶ 24ft.	7.0 lbs