

Look at some of the New Stuff that is in our  
**MARCH 2010 ON-LINE CATALOG**



**HARDENED BALL BEARINGS!**  
**EPDM O'RINGS STANDARD!**



## 'USA' - BRECO - 'USA' COUPLINGS & PLUGS ARE BACK!

PART #	BRECO COUPLINGS
BC4F	1/4" FPT Inlet, 1/4" Coupler Outlet
BC4M	1/4" MPT Inlet, 1/4" Coupler Outlet
BC8F	3/8" FPT Inlet, 3/8" Coupler Outlet
BC8M	3/8" MPT Inlet, 3/8" Coupler Outlet

PART #	BRECO PLUGS
BP4F	1/4" FPT Inlet, 1/4" Plug Outlet
BP4M	1/4" MPT Inlet, 1/4" Plug Outlet
BP8F	3/8" FPT Inlet, 3/8" Plug Outlet
BP8M	3/8" MPT Inlet, 3/8" Plug Outlet

Go to <http://www.envirospec.com> to view catalog and find the most incredible prices in the industry!

## Containment Pallets



## Drum Funnel and Cover



## Drum Lids

• Keeps our dirt and contaminants.



## CERAMIC NOZZLES LAST 10 TIME LONGER than Stainless Steel at only Twice the Price!

INDUSTRIAL NOZZLES FOR HIGH PRESSURES

### Ceramic is an exceptional material :

The office of the ALBUZ TEC IAS range of nozzles is a white ceramic. This ceramic material was specifically developed for high pressures and... is almost as wear resistant as diamond. The properties of the ceramic material are the keys to successful industrial nozzles applications :

- High mechanical resistance
- Corrosion resistance
- High hardness
- Resistance to high temperatures
- Resistance to high pressures
- Exceptional wear resistance
- Ultra smooth surfaces.


### General characteristics :

- ALBUZ TEC ceramic inserts (excellent precision, high wear resistance)
- Flat fan jet angles from 0° to 40° at 3 bar
- Maximum pressure : 300 bar (4330 PSI)
- Maximum temperature : 125°C (278° F)
- Body model : Stainless steel AISI 304 L
- The U form insert allows better flow characteristics at high pressures
- Smooth surfaces allow better flow characteristics.

### Wear resistance :

- Nozzle wear generally depends on three parameters :
  - The pressure (the higher pressure, the higher wear)
  - The abrasiveness of the fluid (the more solids the higher the wear)
  - The corrosive nature of the fluid.

• After hours of use with abrasive, corrosive and/or high pressure fluids, traditional nozzles will deteriorate the internal hole, enlarging the diameter, increasing the flow rate changing the spray configuration and modifying the droplet size and distribution. Thanks to the exceptional material characteristics of the ALBUZ TEC ceramic material, the IAS nozzle range proves it's cost effectiveness through longer life and better performances.

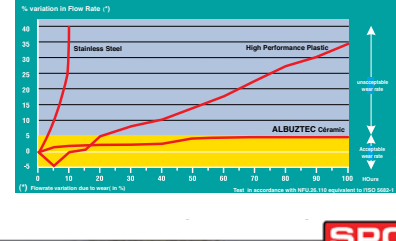

### SCREW-IN MEG NOZZLES

SIZE	3"	15"	25"	40"
3.0	NOC-0003	NOC-1503	NOC-2503	NOC-4003
3.5	NOC-0003.5	NOC-1503.5	NOC-2503.5	NOC-4003.5
4.0	NOC-0004	NOC-1504	NOC-2504	NOC-4004
4.5	NOC-0004.5	NOC-1504.5	NOC-2504.5	NOC-4004.5
5.0	NOC-0005	NOC-1505	NOC-2505	NOC-4005
5.5	NOC-0005.5	NOC-1505.5	NOC-2505.5	NOC-4005.5
6.0	NOC-0006	NOC-1506	NOC-2506	NOC-4006

### QUICK CONNECT NOZZLES

SIZE	3"	15"	25"	40"
3.0	NOCQ-0003	NOCQ-1503	NOCQ-2503	NOCQ-4003
3.5	NOCQ-0003.5	NOCQ-1503.5	NOCQ-2503.5	NOCQ-4003.5
4.0	NOCQ-0004	NOCQ-1504	NOCQ-2504	NOCQ-4004
4.5	NOCQ-0004.5	NOCQ-1504.5	NOCQ-2504.5	NOCQ-4004.5
5.0	NOCQ-0005	NOCQ-1505	NOCQ-2505	NOCQ-4005
5.5	NOCQ-0005.5	NOCQ-1505.5	NOCQ-2505.5	NOCQ-4005.5
6.0	NOCQ-0006	NOCQ-1506	NOCQ-2506	NOCQ-4006

## Truck Wash Pads



**FREE FREIGHT WHEN YOU ORDER FROM THE WEB!**  
See details at <http://www.envirospec.com>

## Stop Spills From Going Down The Drain



## BELT CLIP NOZZLE HOLDER

This high density rubber boot holds 4 nozzles securely.

- No more misplaced nozzles!
- Attaches to belt loop

#7780

**11,000 PSI 'QC' O'RINGS**  
20 EA - 3/8"  
#QOR8X \$17.15



**11,000 PSI 'QC' O'RINGS**  
20 EA - 1/4"  
#QOR4X \$16.00



## 12 VOLT BURNER DIAGNOSTIC CENTER

It will tell you in 2 seconds what it would normally take 2 hours to figure out on your own. A very simple wiring job using the enclosed instructions will have you up and running with a complete 12 volt burner diagnostic center on your machine in 'no time flat.'



Allison Burner Diagnostic Center

**It takes them 2 HOURS to figure out why their burner is not working.**  
**It will take you 2 SECONDS!**

**COMPLETE SYSTEM**  
Ready to install with easy to understand instructions. You will not believe how much down-time you will save with this system.

4001 \$197.21

## GIANT 20290C

NEW FOR 2010

GPM: 12  
PSI: 5000 PSI  
TEMP: 300° F



PART #	DESCRIPTION
2129	GIANT GUN
2129W	Same but with 2' Whip, QC & Swivel

## PUMP REBUILDING 'CD'

How much did you say that you have spent over the years having someone else rebuild your GENERAL PUMP?



Not any more!  
How about 10 minutes to change all the packings & valves?  
Can you live with that?

ORDER #GPV-101

## New for 2010 ALLISON 'SOFT-TOUCH' UNLOADER

Once you use this unloader you will never use another style.

For those of you who like the K7... I guarantee that you will love this unloader.


It feels better than the K-7 and another great feature is that it adjust like a pressure actuated unloader.

This unloader will not cycle like the K7's.

#7637 w/o Micro Switch - Replaces all other unloaders with Micro Switch (Used on Allison Clutch Drive or Idle Down Systems)



GPM: 8.0  
PSI: 3,650 PSI  
TEMP: 195° F



Can be panel mounted or bolted directly to the Pump. Inlet (pump side) has a 3/8" MPT which eliminates the need for additional fittings.

WITH A BUILT-IN 15 AMP MICRO-SWITCH for controlling Clutches, Idle Downs & Burners  
Install the Allison Soft-Touch unloader, connect a couple of wires and you are ready to go.

**OVER 300 NEW ITEMS THIS MONTH ALONE**  
<http://www.envirospec.com>

## Allison "Super Suds Sucker" Up to 33+% DRAW

**The Original "Super Suds Sucker" is back!**

For those of you to new or young to remember... a few years back we designed a chemical injector that would just about suck the bottom out of the pail. Not only that - we were able to put as much as 500' of hose on the machine and still suck as much chemical as most injectors equipped with only 50' of hose.

Here are the two primary advantages of owning a Super Suds Sucker and when you think about it - what else is there? **Longevity** - This could be the last injector you will ever buy. **Longevity** - The ones we built 10 years ago are still 'sucking' strong.

**Product to Surface** - When we first came out with this product we told people that "if you cant get the product to the surface you may as well stay at home" - the same holds true today. With a Super Suds Sucker you will definitely get the product to the surface.



For over 20 years... **John Allison** operated a Mobile Wash company. During this time he recognized that all chemical injectors had one thing in common. None of them could get enough chemical on the surface. Since that time Mr. Allison has designed some of the finest injectors in the industry under the "Super Suds Sucker" logo. However, in the past the manufacturing cost was so high that it made it difficult to bring them to market. **But** now you can experience the precision of these high induction injectors at a much more affordable price!

Super Suds Sucker comes with additional nozzles that will range from 2 to 10 GPM. Complete with... quick connects, chemical line & chemical filter. **READY TO GO!**

PART #	DESCRIPTION
1964	ALLISON SUPER SUDS SUCKER INJECTOR
1439	REPAIR KIT

What do most people say when they first try it?  
**NOW THIS SUCKS!**  
TRY A **Super Suds Sucker** TODAY!

## DRAIN PLUGS

- Tapered design wedges securely into standard drains to stop any flow.
- Eyebolts are removable, allowing installation of grating with Drain Plug in place.
- Non-absorbing, easily cleaned for repeated use.



ULTRA-DRAIN PLUGS	
Flexible polyurethane material	2" dia. (51 mm dia.) conical plug, Weight: 2 lbs. (1 kg)
Resists oil, water and most aggressive chemicals	3" dia. (77 mm dia.) conical plug, Weight: 2 lbs. (1 kg)
Prevents contaminants from entering drain	4" dia. (102 mm dia.) conical plug, Weight: 3 lbs. (1.5 kg)
Non-absorbing material	6" dia. (153 mm dia.) conical plug, Weight: 6 lbs. (3 kg)
Cleans with soap and water	8" dia. (204 mm dia.) conical plug, Weight: 13 lbs. (6 kg)
Safety orange color	10" dia. (254 mm dia.) conical plug, Weight: 16 lbs. (7.5 kg)
	12" dia. (305 mm dia.) conical plug, Weight: 25 lbs. (11 kg)

STANDARD SIZES:	
2" Diameter	5034
3" Diameter	5035
4" Diameter	5036
6" Diameter	5037
8" Diameter	5038
10" Diameter	5039
12" Diameter	5040
3-Plug Kit*	5041

\* Includes one each of 2", 3" and 4" Ultra-Drain Plugs and Plastic Carrying Case.