


FEATURES

- Most widely-used pump frame in the touchless carwash industry
- Forged brass manifold with exclusive lifetime warranty
- High flow applications
- Dual manifolds utilizing a common crankcase for efficient performance
- Solid ceramic plungers with continuously lubricated packings
- Unitized stainless steel inlet and discharge valves
- Bronze connecting rods for maximum life

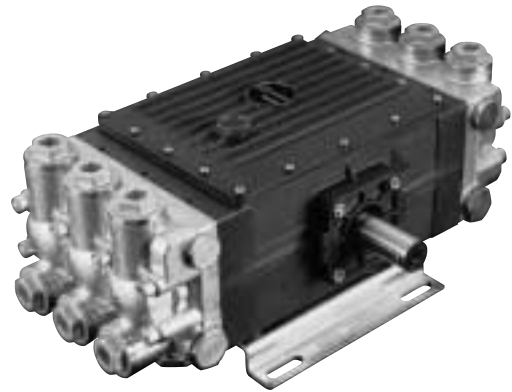

SPECIFICATIONS

Pump Model	CW1541
Maximum Volume	41.0 GPM
Maximum Discharge Pressure	1200 PSI
Maximum Pump Speed	1000 RPM
Maximum Inlet Vacuum	9 ft. water (7.9 in. Hg)
Bore	1.417 in. / 36 mm
Stroke	1.102 in. / 28 mm
Crankcase Oil Capacity	2 quarts
Maximum Fluid Temperature	165°F
Inlet Port Thread	1-11 NPT-F
Discharge Port Thread	3/4-14 NPT-F
Shaft Diameter.	1.378 in. / 35 mm
Weight	156 lbs.
Dimensions	22.1 x 14.0 x 9.7 in.