


3400 RPM - Gas Engine Flange

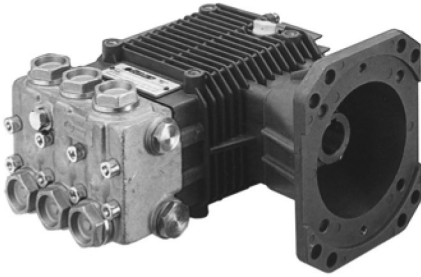

- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves
- Stainless steel piston guides
- Buna-textile V-packings
- Oversized bronze connecting rods
- Reversible crankcase for right or left hand mounting
- Gas engine mounting flange with 1" hollow shaft

MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
HWD 3540 G	3.5	4000	3400	1" Hollow	18mm	20.0
HWD 4040 G	4.0	4000	3400	1" Hollow	18mm	20.0
HWD 4540 G	4.5	4000	3400	1" Hollow	18mm	20.0

FW & HW Series Pumps with Gear Reducer

1450 RPM - Gear Reduction Drive



- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves & piston guides
- Buna-textile V-packings
- Oversized bronze connecting rods
- 24mm solid, keyed shaft on pump
- 2.2:1 gear reduction with 1" hollow shaft for direct mounting to gas engines

MODEL #	GPM	PSI	RPM(Pump/Drive)	SHAFT	PISTON	WT.
FW 3530 SGR	3.7	3000	1450/3400	1" Hollow	18mm	28.3
FW 4030 SGR	4.2	3000	1450/3400	1" Hollow	18mm	29.4
FW 5030 SGR	5.3	3000	1450/3400	1" Hollow	20mm	29.4
FW 5530 SGR	5.8	3000	1450/3400	1" Hollow	20mm	29.4
HW 4040 SGR	4.2	4000	1450/3400	1" Hollow	18mm	31.0
HW 4540 SGR	4.8	4000	1450/3400	1" Hollow	18mm	31.0