

LWS

Series Pumps

1750 RPM - 24mm Solid Shaft




- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves & piston guides
- Buna-textile V-packings
- Reversible crankcase for right or left hand mounting
- 24mm solid, keyed shaft

MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
LWS 2010 SA*	2.2	1000	1750	24mm Solid	15mm	10.4
LWS 2020 S	2.2	2000	1750	24mm Solid	15mm	13.4
LWS 3020 S	3.1	2000	1750	24mm Solid	18mm	13.4
LWS 4020 S	4.0	2000	1750	24mm Solid	18mm	13.4
LWS 3025 S	3.2	2500	1750	24mm Solid	18mm	13.4
LWS 3525 S	3.5	2500	1750	24mm Solid	18mm	13.4

LWS

Series Pumps

1750 RPM - NEMA 56C - 5/8" Hollow Shaft

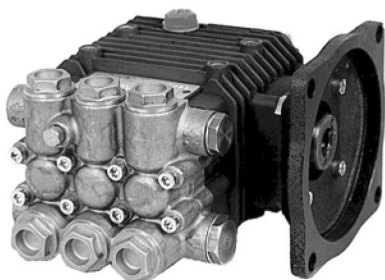

- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves & piston guides
- Buna-textile V-packings
- Reversible crankcase for right or left hand mounting
- NEMA 56C electric motor flange with 5/8" hollow shaft

MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
LWS 2010 EA*	2.2	1000.	1750	5/8" Hollow	15mm	10.4
LWS 2020 E	2.2	2000.	1750	5/8" Hollow	15mm	13.4
LWS 3020 E	3.0	2000	1750	5/8" Hollow	18mm	13.4
LWS 3520 E	3.6	2000	1750	5/8" Hollow	18mm	13.4