


- Increased Fin Depth Increases Surface Area to Maximize Heat Dissipation
- Stainless Steel Unitized Check Valves
- Heat-Resistant Solid Ceramic Plungers Operating on Lubricated Packings
- Direct Drive Mounting Flange



- Reinforced Crankcase for Increased Load Capacity
- Enlarged Crankcase Increases Oil Capacity for Better Lubrication and Lower Operating Temperatures
- One-Piece Industrial-Grade Oversized Bronze Connecting Rods

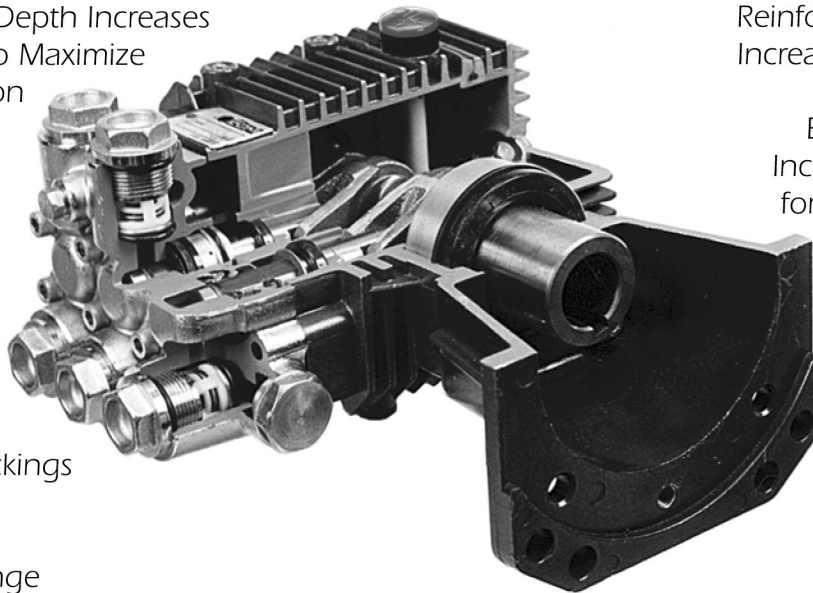

3400 RPM - Gas Engine Flange



- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves
- Buna-textile V-packings
- Reversible crankcase for right or left hand mounting
- Gas engine mounting flange

MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
ZWD 2530 G	2.5	3200	3400	3/4" Hollow	15mm	16.5
ZWD 3030 G	3.0	3200	3400	1" Hollow	15mm	16.5
ZWD 3530 G	3.5	3200	3400	1" Hollow	15mm	16.5
ZWD 4030 G	4.0	3200	3400	1" Hollow	15mm	16.5
ZWD 3040 G	3.0	4000	3400	1" Hollow	15mm	16.5
ZWD 3540 G	3.5	4000	3400	1" Hollow	15mm	16.5
ZWD 4040 G	4.0	4000	3400	1" Hollow	15mm	16.5
Pump with Built-In Unloader						
ZWD 3030 G-K	3.0	3000	3400	1" Hollow	15mm	17.4
ZWD 3530 G-K	3.5	3000	3400	1" Hollow	15mm	17.4
ZWD 4030 G-K	4.0	3000	3400	1" Hollow	15mm	17.4