

FWS

Series Pumps

1750 RPM - 24mm Solid Keyed Shaft




- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves and piston guides
- Oversized bronze connecting rods
- Buna-textile V-packings
- Reversible crankcase for right or left hand mounting
- 24mm solid, keyed shaft

MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
FWS 6020 S	6.0	2000	1750	24mm Solid	20mm	19.6
FWS 5525 S	5.7	2500	1750	24mm Solid	20mm	19.6
FWS 3530 S	3.6	3000	1750	24mm Solid	18mm	19.6
FWS 4030 S	4.0	3000	1750	24mm Solid	18mm	19.6
FWS 4530 S	4.6	3000	1750	24mm Solid	18mm	19.6

FWS

Series Pumps

1750 RPM - 184T Elec. Flange

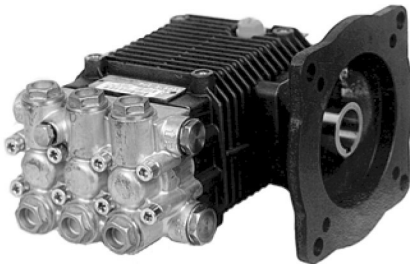

- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves and piston guides
- Oversized bronze connecting rods
- Buna-textile V-packings
- Reversible crankcase for right or left hand mounting
- 184T electric motor flange with 1-1/8" hollow shaft

MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
FWS 3530 E	3.6	3000	1750	1 1/8" Hollow	18mm	20.3
FWS 4030 E	3.9	3000	1750	1 1/8" Hollow	18mm	20.3
FWS 4530 E	4.6	3000	1750	1 1/8" Hollow	18mm	20.3
FWS 5030 E	4.9	3000	1750	1 1/8" Hollow	20mm	20.3
FWS 5530 E	5.5	3000	1750	1 1/8" Hollow	20mm	20.3