

COOLDRIVE

STAINLESS STEEL




Powered by a commercial grade 13HP Honda GX390 engine with steel gas tank and oil alert engine.

Industrial triplex pump with oil sight glass, oil drain plug, and EZ Start adjustable unloader.


Powered by **HONDA ENGINES**




QUICK REMOVE COVER. Stainless steel belt guard removes easily in 20 seconds with 3 hand-tightening knobs. No tools are required.



COOLER PUMP. Cool air is propelled over the pump, reducing the heat by 25%. **AIR VENTS.** Cool air is drawn into the unit through the outer air vents.



PULLEY SYSTEM. Laser aligned patented pulley fanning system creates cooling air flow and helps prevent slippage.

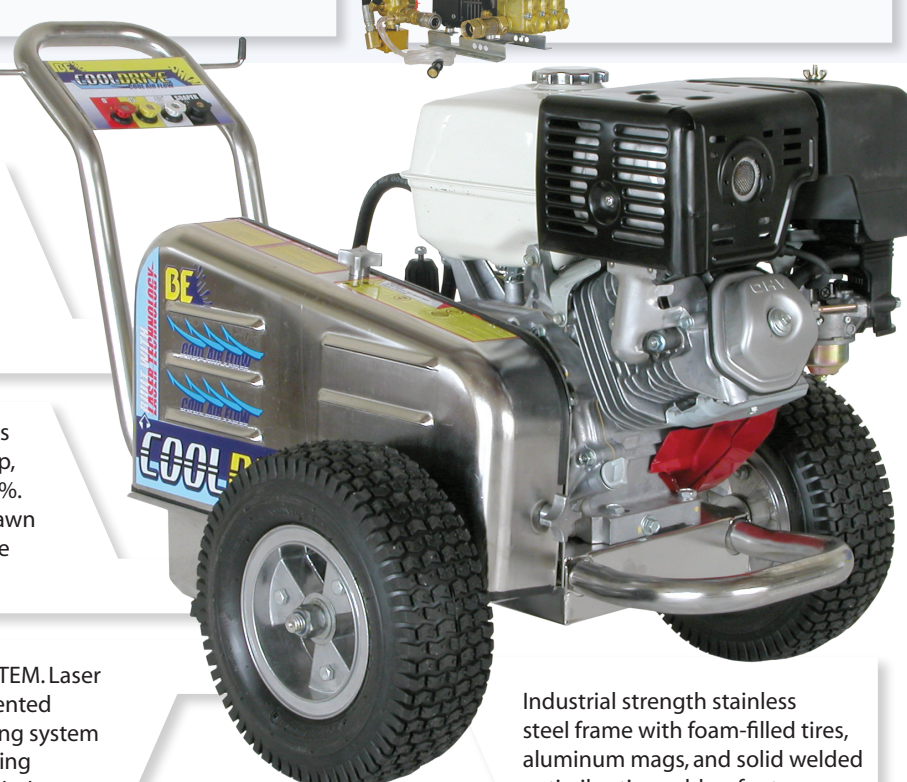

Industrial strength stainless steel frame with foam-filled tires, aluminum mags, and solid welded anti-vibration rubber foot.

Model#	Engine	Pump	PSI	GPM	Weight
	Honda 13 HP GX390 Oil Alert				210 lbs
	Honda 13 HP GX390 Oil Alert				210 lbs

Additional Features

- 14,000 Cleaning Units
- Thermal Relief Valve Protects the Pump from Overheating
- Safety Relief Valve
- Adjustable Unloader
- Low Pressure Chemical Injector
- Quick Connect nozzles in 0°, 15°, 40°, and soap nozzle
- 36" Insulated Lance with Molded Grip
- Industrial 5,000 PSI spray gun.
- Clear bowl filter for easy inspection
- 50' steel wire braided, non-marking hose
- Patented Cooldrive technology