
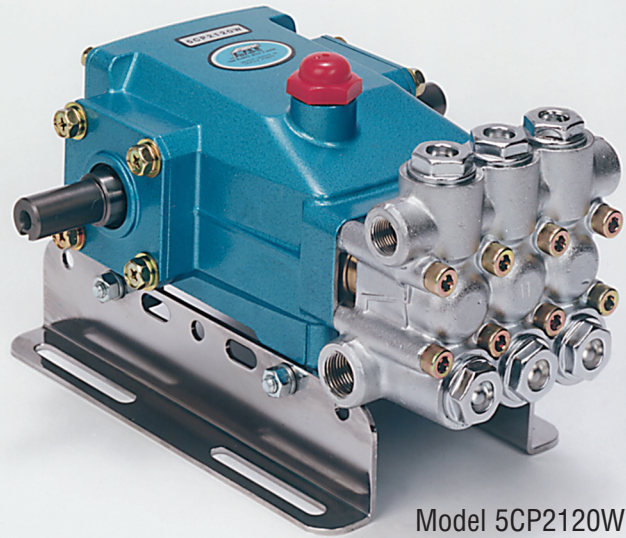
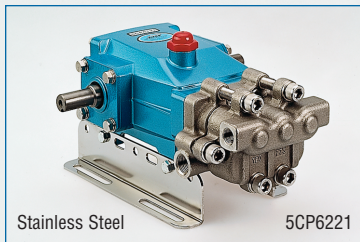
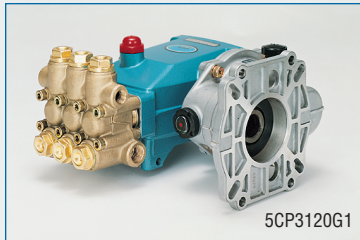


# High Pressure Mid-Size Industrial Pumps

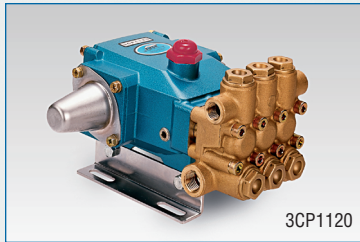

*Durable,  
Easy to  
Service  
Manifolds*

## 3, 5 AND 7 CP FRAME TRIPLEX PLUNGER PUMP SELECTION

PUMP MODEL	Flow GPM (L/M)	Pressure PSI (BAR)	Manifold Material	Horsepower HP (kW)	RPM	Drive Type
<b>3CP</b>						
3CP1120	4.2 (15.9)	100 to 2200 (7 to 155)	Brass	6.3 (4.7)	1725	Belt/Direct
3CP1120G	3.5 (13.2)	100 to 2200 (7 to 155)	Brass	5.3 (3.9)	3600	Gearbox
3CP1130	2.4 (9.0)	100 to 2200 (7 to 155)	Brass	3.6 (2.7)	1725	Belt/Direct
3CP1140	3.6 (13.6)	100 to 2200 (7 to 155)	Brass	5.4 (4.0)	1725	Belt/Direct
<b>5CP</b>						
5CP2120W	4.0 (15.0)	100 to 2500 (7 to 175)	W770	6.9 (5.1)	950	Belt
5CP2140WCS	4.0 (15.0)	100 to 2500 (7 to 175)	W770	6.9 (5.1)	1725	Belt/Direct
5CP2150W	5.0 (19.0)	100 to 2000 (7 to 140)	W770	6.9 (5.1)	1725	Belt/Direct
5CP3120	4.5 (17.0)	100 to 3500 (7 to 245)	Brass	10.8 (8.0)	1645	Belt
5CP3120G1	4.5 (17.0)	100 to 3500 (7 to 245)	Brass	10.8 (8.0)	3353	Gearbox
5CP3130G1	3.8 (14.3)	100 to 3500 (7 to 245)	Brass	9.1 (6.8)	3200	Gearbox
5CP5120	5.0 (19.0)	100 to 3000 (7 to 210)	Brass	10.3 (7.7)	1415	Belt
5CP5150G1	5.0 (19.0)	100 to 3000 (7 to 210)	Brass	10.3 (7.7)	3200	Gearbox
5CP6120	6.0 (23.0)	100 to 1600 (7 to 110)	Brass	6.6 (4.9)	1400	Belt
5CP6120G1	6.7 (25.0)	100 to 1600 (7 to 110)	Brass	7.3 (5.4)	3200	Gearbox
5CP6221	6.0 (23.0)	100 to 2000 (7 to 140)	SS	8.2 (6.1)	1400	Belt
5CP6241CS	4.0 (15.0)	100 to 2000 (7 to 140)	SS	5.5 (4.1)	1725	Belt/Direct
5CP6251	5.0 (19.0)	100 to 2000 (7 to 140)	SS	6.8 (5.0)	1725	Belt/Direct
<b>7CP</b>						
7CP6170	11.0 (41.6)	100 to 2000 (7 to 140)	Brass	15.1 (11.3)	1450	Belt

Detailed Data Sheets are available for each model at [www.catpumps.com/data-sheets/pump-parts-lists](http://www.catpumps.com/data-sheets/pump-parts-lists).

