
## **Large Frame Industrial-Duty Piston Pumps**

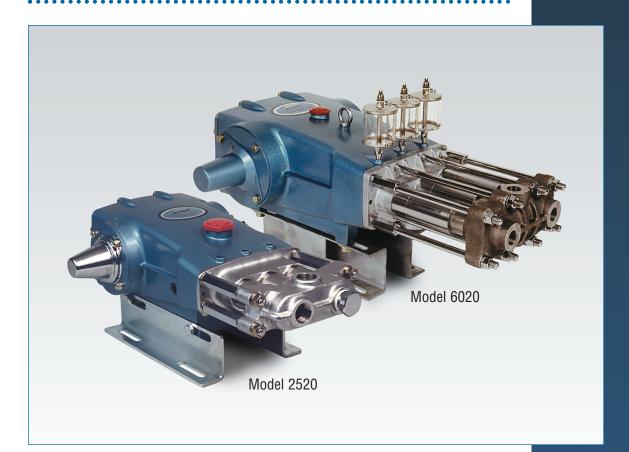

High Flow
with
Excellent
Suction
Capability

## 25 AND 60 FRAME TRIPLEX PISTON PUMP SELECTION

PUMP Model	Flow GPM (L/M)	Pres PSI	sure (BAR)	Manifold Material	Horsepower HP (kW)	RPM	Drive Type
25 Frame							
1020	10.0 (38.0)	100 to 1200	(7 to 85)	Brass	8.2 (6.1)	720	Belt
1520	15.0 (57.0)	100 to 1000	(7 to 70)	Brass	10.3 (7.7)	830	Belt
1521	15.0 (57.0)	100 to 1000	(7 to 70)	SS	10.3 (7.7)	830	Belt
2520	25.0 (95.0)	100 to 800	(7 to 55)	Brass	13.7 (10.2)	772	Belt
2521	25.0 (95.0)	100 to 800	(7 to 55)	SS	13.7 (10.2)	772	Belt
2520C	25.0 (95.0)	100 to 800	(7 to 55)	Brass	13.7 (10.2)	772	Belt
60 Frame							
6020	60.0 (227.0)	100 to 1000	(7 to 70)	Brass	41.1 (30.6)	500	Belt
6021	60.0 (227.0)	100 to 1000	(7 to 70)	SS	41.1 (30.6)	500	Belt
6024	12.0 (45.0)	100 to 5000	(7 to 345)	Brass/SS	41.1 (30.6)	500	Belt
6040	40.0 (151.0)	100 to 1500	(7 to 105)	Brass	41.1 (30.6)	500	Belt
6041	40.0 (151.0)	100 to 1500	(7 to 105)	SS	41.1 (30.6)	500	Belt
6044	20.0 (76.0)	100 to 3000	(7 to 210)	Brass/SS	41.1 (30.6)	500	Belt

NOTE: SS=316 stainless steel manifolds, standard chromeplated 304 stainless steel cylinder and sleeves and 304 stainless steel valves and seats.

Detailed Data Sheets are available for each model at www.catpumps.com/data sheets/pump parts lists.

