


T Series 77

20 mm bore – Sixplex Plunger Pump

FEATURES

- Nickel-plated forged brass manifold with exclusive lifetime warranty
- Unique “in-line” valve system for easy access and durability
- High pressure and high flow option
- Dual manifolds utilizing a common crankcase for efficient performance
- Proven crankcase and bearing design
- Bronze connecting rods for maximum life

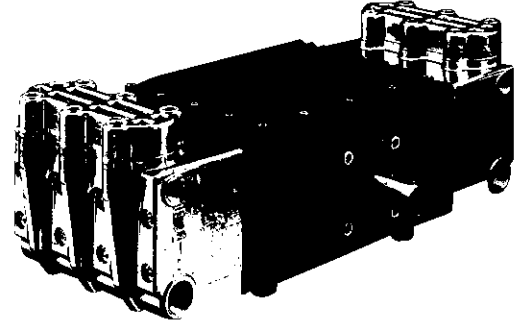

SPECIFICATIONS

Pump Model	T3551-N
Maximum Volume	13.0 GPM
Maximum Discharge Pressure	4350 PSI
Maximum Pump Speed	1000 RPM
Maximum Inlet Pressure	125 PSI
Maximum Inlet Vacuum	7 ft. water (6.2 in. Hg)
Bore	.787 in. / 20 mm
Stroke	1.102 / 28
Crankcase Oil Capacity	71 oz.
Maximum Fluid Temperature	165°F
Inlet Port Thread	1-11 BSPP-F
Discharge Port Thread	1/2-14 BSPP-F
Shaft Diameter.	1.378 in. / 35 mm
Weight	174 lbs.
Dimensions	25.2 x 14.0 x 10.0 in.