


FEATURES

- Forged brass manifold that's twice as strong as cast
- Stainless steel piston guides
- Unique "in-line" valve system for easy access and durability
- Small bore combined with long stroke for maximum efficiency
- Thermally-bonded ceramic coating rated to 10,000 PSI
- Proven crankcase and bearing design
- Available in left-handed "L" version

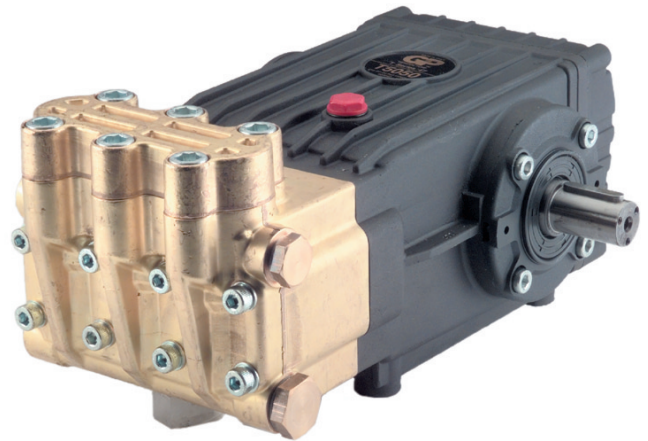

SPECIFICATIONS

Pump Model	T5050
Maximum Volume	5.0 GPM
Maximum Discharge Pressure	5000 PSI
Maximum Pump Speed	1845 RPM
Maximum Inlet Pressure	30 – 125 PSI
Maximum Inlet Vacuum	9 ft. water (7.9 in. Hg)
Bore	.630 in. / 16 mm
Stroke	.748 in. / 19 mm
Crankcase Oil Capacity	40.6 oz.
Maximum Fluid Temperature	165°F
Inlet Port Thread	(2) 1/2-14 BSPP-F
Discharge Port Thread	(2) 3/8-19 BSPP-F
Shaft Diameter.	.945 in. / 24 mm
Weight	41 lbs.
Dimensions	14.2 x 9.2 x 6.9 in.