


TP Series 51, S17

Triplex Plunger Pump – Solid Shaft

FEATURES

- Forged brass manifold with exclusive lifetime warranty
- Die cast, anodized aluminum, oil-bath crankcase
- Solid ceramic plungers with continuously lubricated packings
- The original Interpump unitized, stainless steel, K01 inlet and outlet valves
- Ideal for all general cleaning applications
- Standard with 24 mm solid shaft for pulley mount or direct drive with flex coupler and bell housing
- Also available in “L” left-handed versions

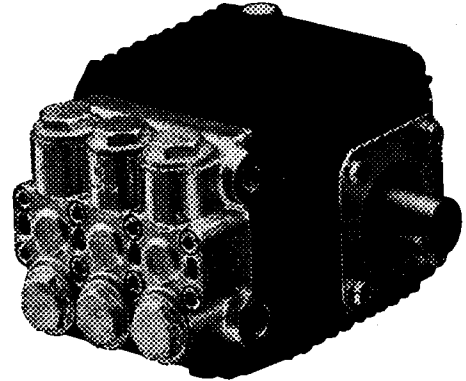

SPECIFICATIONS

Pump Model	TP2021S17	TP2024S17	TP2032S17
Maximum Volume	2.1 GPM	2.4 GPM	3.2 GPM
Maximum Discharge Pressure	2500 PSI	2000 PSI	
Maximum Pump Speed	1750 RPM		
Maximum Inlet Pressure	125 PSI		
Maximum Inlet Vacuum	3 ft. water (2.6 in. Hg)		
Bore	.591 in. / 15 mm	.709 in. / 18 mm	
Stroke	.370 in. / 9.4 mm	.283 in. / 7.2 mm	.370 in. / 9.4 mm
Crankcase Oil Capacity	11.2 oz.		
Maximum Fluid Temperature	165°F		
Inlet Port Thread	3/8-19 BSPP-F		
Discharge Port Thread	1/4-19 BSPP-F		
Shaft Diameter	.945 in. / 24 mm		
Weight	11.2 lbs.		
Dimensions	7.0 x 6.9 x 5.1 in.		