


### FEATURES

- The preferred pump frame in the pressure cleaning industry
- Forged brass manifold with an exclusive lifetime warranty
- Large-capacity, die-cast, anodized aluminum oil-bath crankcase
- Over-sized connecting rods for maximum life
- Heavy-duty tapered roller bearing.
- Solid ceramic plungers with continuously lubricated packings
- Unitized stainless steel inlet and discharge valves
- Available in left-handed “L” version

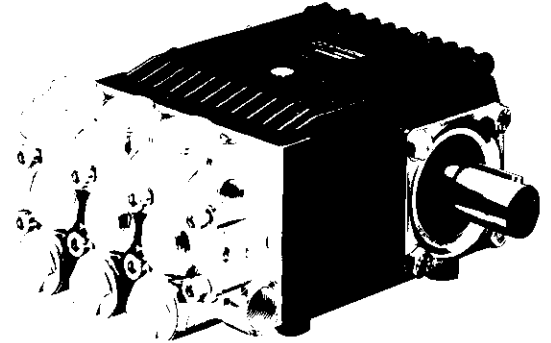

### SPECIFICATIONS

| Pump Model                 | TS1041                   | TS1531   |
|----------------------------|--------------------------|----------|
| Maximum Volume             | 8.0 GPM                  | 7.92 GPM |
| Maximum Discharge Pressure | 1600 PSI                 | 2200 PSI |
| Maximum Pump Speed         | 1450 RPM                 |          |
| Maximum Inlet Pressure     | 125 PSI                  |          |
| Maximum Inlet Vacuum       | 9 ft. water (7.9 in. Hg) |          |
| Bore                       | .787 in. / 20 mm         |          |
| Stroke                     | .866 in. / 22 mm         |          |
| Crankcase Oil Capacity     | 50.7 oz.                 |          |
| Maximum Fluid Temperature  | 165°F                    |          |
| Inlet Port Thread          | 3/4-14 BSPP-F            |          |
| Discharge Port Thread      | 3/8-19 BSPP-F            |          |
| Shaft Diameter.            | 1.378 in. / 35 mm        |          |
| Weight                     | 46 lbs.                  |          |
| Dimensions                 | 13.0 x 11.9 x 7.3 in.    |          |