


FIBERGLASS, SUPER HEAVY DUTY

COMMERCIAL USE TELESCOPING WANDS




Easily clean rooftops with a telescoping wand.

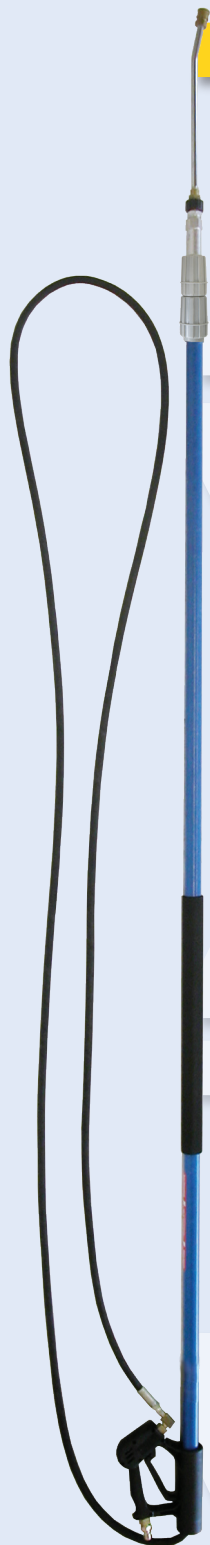

Threaded gun for quick removal and easy field repair.



Screw type connection for a solid grip on accessories.




Coarse threaded pole lock for a tight grip.



Two fiberglass outer poles and one aluminum inner pole for maximum strength.



Large 3/8" hose for maximum chemical draw.



LONG WAND SPRAY GUN



REPAIR KITS	Part#
Repair kit	85.201.005

Part#	85.202.114
Max Pressure	4,000 PSI
Max Temp	200° F
Max Flow	10 GPM
Outlet	1/4" FNPT
Inlet	3/8" FNPT
Weight	2.12 lbs

Part#	Replacement Parts
85.205.104	Small Pole Lock
85.205.105	Large Pole Lock

Model#	Max Pressure	Max Flow	Max Temp.	Length	Hose	Weight
	4,000 PSI	8 GPM	200°F	9ft. ▶ 24ft.	3/8"	16 lbs