

### UNLOADER, ARROWLINE




<b>Max Pressure</b>	4,200 PSI
<b>Max Temperature</b>	190° F
<b>Max Flow</b>	7.8 GPM
<b>Inlet/Outlet</b>	3/8" FNPT
<b>Bypass</b>	3/8" FNPT
<b>Weight</b>	2.1 lbs

### UNLOADER, ARROWLINE 'EZ-START'



<b>Max Pressure</b>	4,350 PSI
<b>Max Temperature</b>	190° F
<b>Max Flow</b>	7.8 GPM
<b>Inlet/Outlet</b>	3/8" FNPT
<b>Bypass</b>	3/8" FNPT
<b>Weight</b>	2.1 lbs

### UNLOADER, PA




<b>Max Pressure</b>	5,000 PSI
<b>Max Temperature</b>	190° F
<b>Max Flow</b>	7.8 GPM
<b>Inlet/Outlet</b>	3/8" FNPT
<b>Bypass</b>	3/8" FNPT
<b>Weight</b>	2.1 lbs

### UNLOADER, VB80/280



<b>Max Pressure</b>	4,000 PSI
<b>Max Temperature</b>	180° F
<b>Max Flow</b>	21 GPM
<b>Inlet/Outlet</b>	1/2" FNPT
<b>Bypass</b>	1/2" FNPT
<b>Weight</b>	3.05 lbs

### UNLOADER, PULSAR 280

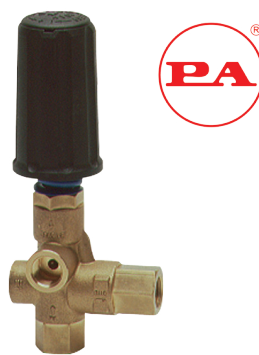

<b>Max Pressure</b>	4,500 PSI
<b>Max Temperature</b>	195° F
<b>Max Flow</b>	8 GPM
<b>Inlet/Outlet</b>	3/8" FNPT
<b>Bypass</b>	3/8" FNPT
<b>Weight</b>	1.75 lbs