


24" WHIRL-A-WAY, STAINLESS STEEL

PACKAGING: Boxed

STAINLESS STEEL



Circular design allows a zero wall clearance.




Sample look at the cleaning results of a Whirl-A-Way.



The following comparison chart shows the time taken to clean a typical size driveway (400 sq. ft.) using 3 different components.

Unit	Time to clean
▶ Whirl-A-Way	10 Minutes
Water Broom	30 Minutes
Spray Nozzle	80 Minutes

Whirl-A-Way Rotary Head Breakdown

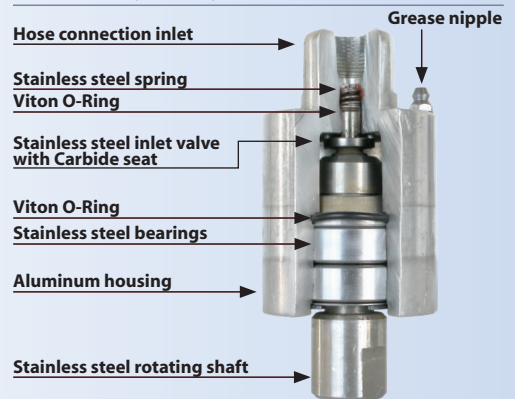

Part#	Optional Kits
85.300.044	Ball Valve Kit
Allows you to switch between Whirl-A-Way and Wand without having to shutdown the unit.	



Part#	Replacement Part
85.790.004	Rotary Head
85.791.010S	Tri-Rotary Arm 11"R
85.790.020	1.5" Non Marking Caster
85.790.019S	Nylon Brush Skirt
85.790.010	Rotary Head Repair Kit
85.225.020	Replacement Nozzle Tip
85.202.115	Replacement Spray Gun

#	Model#	Max Pressure	Max Flow	Max Temp.	Size	Weight
6	BE-2400WAWS MODEL SHOWN	4,000 PSI	8.0 GPM	180°F	24" diameter	45 lbs.

Pic	Feature	Pic	Feature
1	Non Marking Casters	5	Welded Elbows and Assembly
2	Stainless Steel Bearings	6	Field Repairable Gun
3	4,000 PSI Rotary Head, 160°F		• Water Flow Out Front Prevents Cavitation
4	Welded Stainless Steel Rotary Arm		• Zero Wall Clearance

