


# FWD

## Series Pumps

### 3400 RPM - 184T Elec. Flange

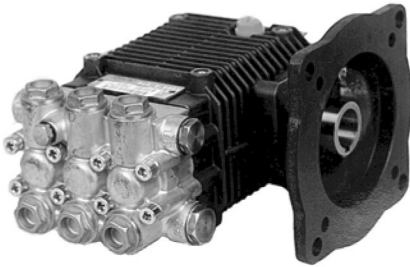


- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves
- Stainless steel piston guides
- Buna-textile V-packings
- Oversized bronze connecting rods
- Reversible crankcase for right or left hand mounting
- 184T electric motor flange with 1-1/8" hollow shaft

PART #	MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
<b>6402.0103.00</b>	FWD 3530 E	3.5	3000	3400	1 1/8" Hollow	18mm	20.3
<b>6402.0308.00</b>	FWD 4030 E	4.0	3000	3400	1 1/8" Hollow	18mm	20.3
<b>6402.0801.00</b>	FWD 4530 E	4.5	3000	3400	1 1/8" Hollow	18mm	20.3

# FWD

## Series Pumps

### 3400 RPM - Gas Engine Flange

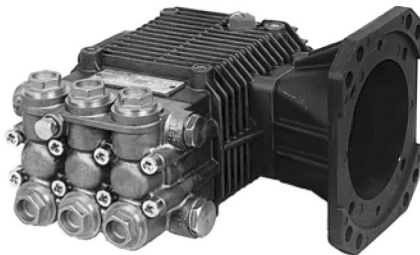

- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves
- Stainless steel piston guides
- Buna-textile V-packings
- Oversized bronze connecting rods
- Reversible crankcase for right or left hand mounting
- Gas engine mounting flange with 1" hollow shaft

PART #	MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
<b>6402.0102.00</b>	FWD 3530 G	3.5	3500	3400	1" Hollow	18mm	20.3
<b>6402.1000.00</b>	FWD 4035 G	4.0	3500	3400	1" Hollow	18mm	20.3
<b>6402.1800.00</b>	FWD 4530 G	4.5	3000	3400	1" Hollow	18mm	20.3