


3400 RPM - Gas Engine Flange

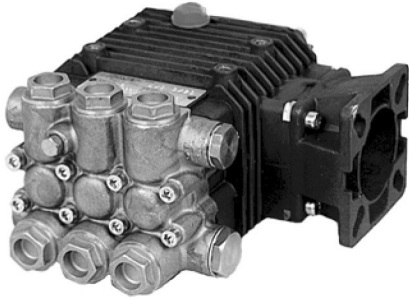

- 1/2" FPT inlet, 3/8" FPT discharge
- Anodized, die-cast aluminum crankcase
- Solid Ceramic Plungers
- Stainless steel check valves & piston guides
- Buna-textile V-packings
- Reversible crankcase for right or left hand mounting
- Gas engine mounting flange with 3/4" hollow shaft

MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
LWD 2010 GA*	2.2	1000	3400	3/4" Hollow	15mm	10.4
LWD 2020 G	2.1	2000	3400	3/4" Hollow	15mm	13.4
LWD 2520 G	2.5	2000	3400	3/4" Hollow	15mm	13.4
LWD 3020 G	3.0	2000	3400	3/4" Hollow	15mm	13.4
LWD 3025 G	3.0	2500	3400	3/4" Hollow	15mm	13.4
LWD 3522 G	3.5	2200	3400	3/4" Hollow	15mm	13.4

Pump with Built-In Unloader

LWD 2020 G-K	2.1	2000	3400	3/4" Hollow	15mm	16.5
LWD 2520 G-K	2.5	2000	3400	3/4" Hollow	15mm	16.5
LWD 3020 G-K	3.0	2000	3400	3/4" Hollow	15mm	16.5
LWD 3025 G-K	3.0	2500	3400	3/4" Hollow	15mm	16.5