


FW SERIES Industrial Duty Plunger Pumps

- Reversible Crankcase for Easy Right or Left Hand Mounting
- Hardened Stainless Steel Piston Guides
- Highly Efficient Stainless Steel Check Valves
- Solid Ceramic Plungers
- High & Low Pressure Seals: High Quality Buna-Textile Packings. Additional Anti-Extrusion Ring under the Seal

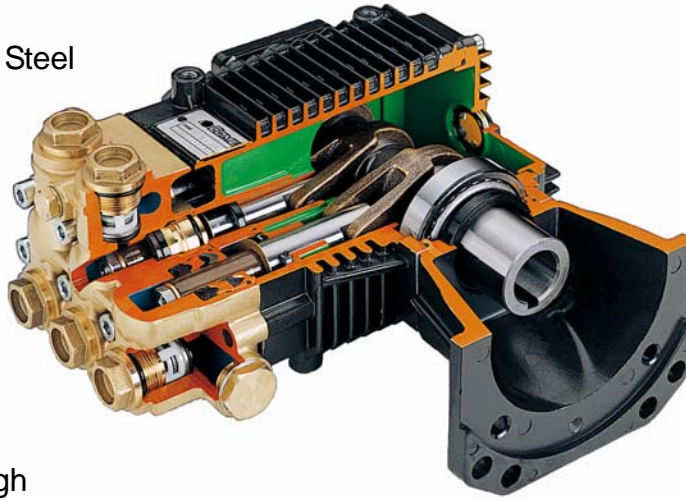

- Solid or Hollow Shaft
- Solid Brass Manifolds
- Special Forged Brass Oversized Connecting Rods
- Flange for Direct Mounting to Gas Engines or Electric Motors (Hollow Shaft Models Only.)
- Die-Cast, Anodized Aluminum Crankcase
- High Quality Tapered Roller Bearings
- Optimal Oil Bath for High Speed Operation

FW

Series Pumps-Solid Shaft



1450 RPM - 24mm Solid Shaft

- 1/2" FPT Inlet, 3/8" FPT Discharge
- Anodized, Die-Cast Aluminum Crankcase
- Solid Ceramic Plungers
- Stainless Steel Check Valves and Piston Guides
- Oversized Bronze Connecting Rods
- Buna-Textile V-Packings
- Reversible Crankcase for Right or Left Hand Mounting
- 24mm Solid, Keyed Shaft

MODEL #	GPM	PSI	RPM	SHAFT	PISTON	WT.
FW 4030 S	4.0	3000	1450	24mm Solid	18mm	19.4
FW 3530 S	3.4	3000	1450	24mm Solid	18mm	19.4
FW 5030 S	5.0	3000	1450	24mm Solid	20mm	19.4
FW 5530 S	5.5	3000	1450	24mm Solid	20mm	19.4

FW Series Mounting Rail Kits

- 5011.0185.00 Standard Mounting Rail Kit for FW Series Pump
- 5011.0216.00 Tall Mounting Rail Kit for FW Series Pumps

FW Series Repair Kits (Kits also on Pages 25 & 26)

5019.0038.00	FW Seal Kit, 18mm	5025.0011.00	Check Valve Kit
5019.0039.00	FW Seal Kit, 20mm	2409.0073.00	FW Piston Kit, 18mm
5019.0044.00	FW Oil Seal Kit Solid Shaft	2409.0074.00	FW Piston Kit, 20mm