


Heavy-Duty Duplex SS Process Pumps

**Duplex
Stainless Steel
Liquid End**

**No Packing
Adjustment
Required**

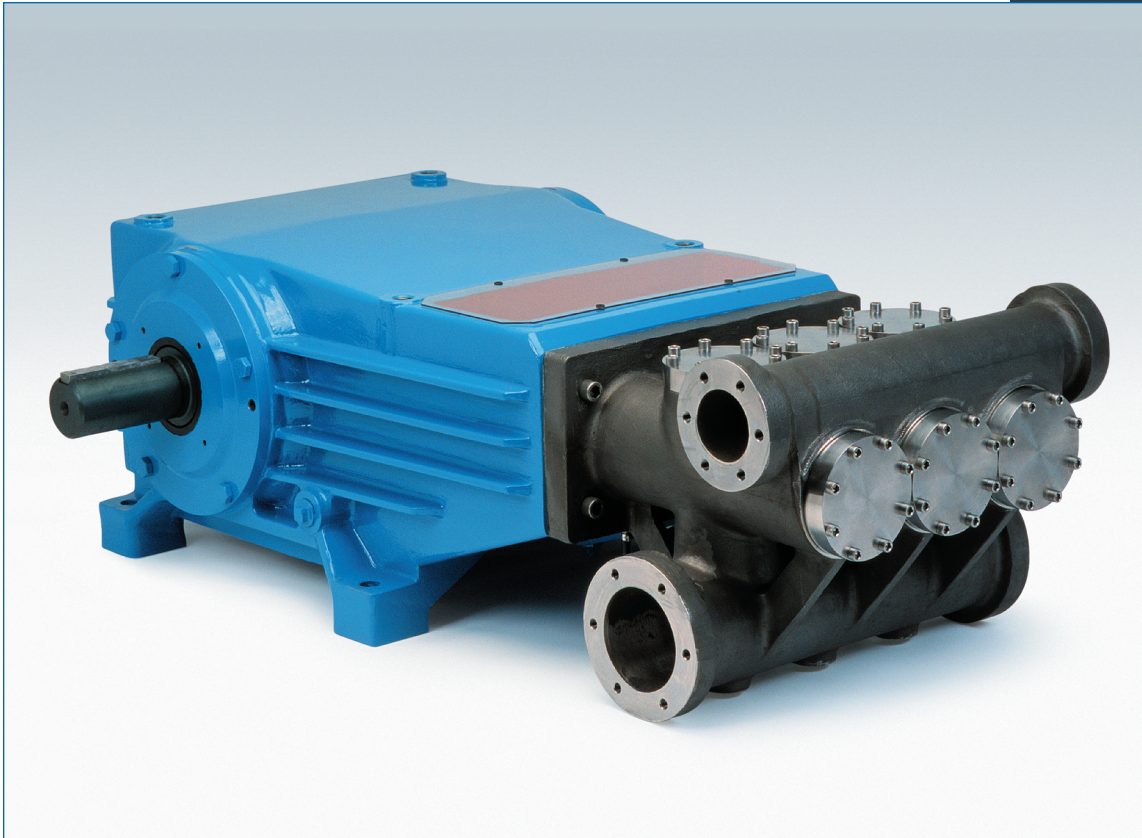

150 FRAME R-SERIES TRIPLEX PLUNGER PUMP SELECTION

PUMP MODEL	Flow GPM (L/M)	Pressure PSI (BAR)	Manifold Material	Horsepower HP (kW)	RPM	Drive Type
150 Frame + Alternate performance rating.						
152R060	115.0 (435.0)	100 to 1200 (7 to 85)	Duplex Stainless	94.5 (70.5)	360	Belt
152R080	200.0 (757.0)	100 to 1200 (7 to 85)	Duplex Stainless	164.4 (122.6)	355	Belt
152R100	260.0 (984.0)	100 to 1000 (7 to 70)	Duplex Stainless	178.1 (132.8)	295	Belt
152R100 +	320.0 (1211.0)	100 to 825 (7 to 57)	Duplex Stainless	181.0 (134.8)	360	Belt
157R060	100.0 (379.0)	100 to 2700 (7 to 190)	Duplex Stainless	184.9 (137.9)	310	Belt
157R060 +	115.0 (435.0)	100 to 2100 (7 to 145)	Duplex Stainless	165.4 (123.3)	360	Belt

Detailed Data Sheets are available for each model at www.catpumps.com/data-sheets/pump-parts-lists.



CAT PUMPS
The Pumps with Nine Lives
www.catpumps.com