




Versatile Direct-Drive Pumps

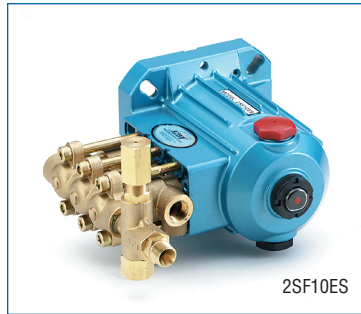

2SF10ES

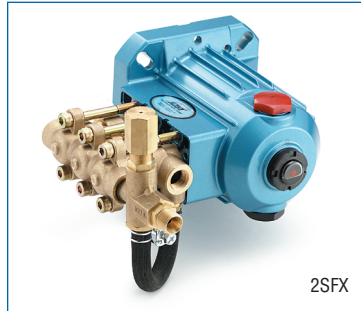

2SFX

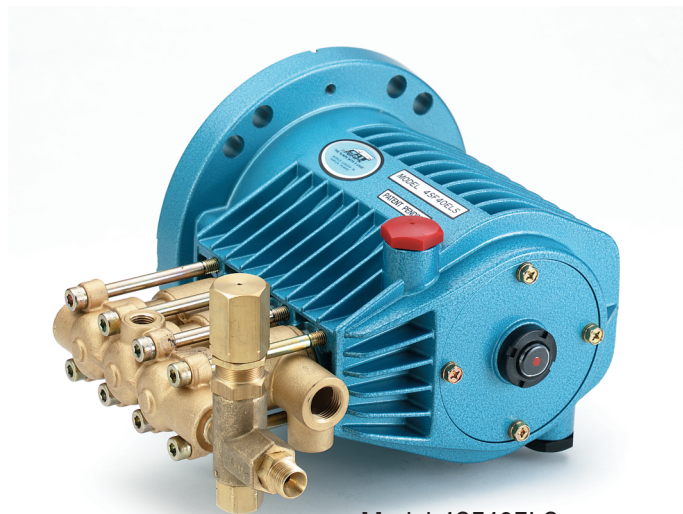

Model 4SF40ELS

**Industrial Duty
Direct-Drive
Pump**

SF DIRECT-DRIVE TRIPLEX PLUNGER PUMP SELECTION

PUMP MODEL	Flow GPM (L/M)	Pressure PSI (BAR)	Manifold Material	Horsepower HP (kW)	RPM	Drive Type
2SF						
2SF10ES	1.0 (3.8)	100 to 2000 (7 to 140)	Brass	1.4 (1.0)	3450	Direct, Electric
2SF20ES	2.0 (7.6)	100 to 2000 (7 to 140)	Brass	2.7 (2.0)	3450	Direct, Electric
2SF22ES	2.2 (8.3)	100 to 2000 (7 to 140)	Brass	3.0 (2.2)	3450	Direct, Electric
2SF22ELS	2.2 (8.3)	100 to 2000 (7 to 140)	Brass	3.0 (2.2)	1725	Direct, Electric
2SF25ELS	2.5 (9.5)	100 to 1500 (7 to 105)	Brass	2.6 (1.9)	1725	Direct, Electric
2SF29ELS	2.85 (10.8)	100 to 1500 (7 to 105)	Brass	2.9 (2.1)	1725	Direct, Electric
2SF30ES	3.0 (11.4)	100 to 1500 (7 to 105)	Brass	3.1 (2.3)	3450	Direct, Electric
2SF30GS	3.0 (11.4)	100 to 2000 (7 to 140)	Brass	4.1 (3.1)	3450	Direct, Gas
2SF35ES	3.5 (13.2)	100 to 1500 (7 to 105)	Brass	3.6 (2.7)	3450	Direct, Electric
2SF35GS	3.5 (13.2)	100 to 2000 (7 to 140)	Brass	4.8 (3.5)	3450	Direct, Gas
2SFX						
2SFX20ES	2.0 (7.6)	100 to 2000 (7 to 140)	Brass	2.7 (2.0)	3450	Direct, Electric
2SFX22ES	2.2 (8.3)	100 to 2000 (7 to 140)	Brass	3.0 (2.2)	3450	Direct, Electric
2SFX25ES	2.5 (9.5)	100 to 1500 (7 to 105)	Brass	2.6 (1.9)	3450	Direct, Electric
2SFX29ELS	2.85 (10.8)	100 to 1500 (7 to 105)	Brass	2.9 (2.1)	1725	Direct, Electric
2SFX30ES	3.0 (11.4)	100 to 1500 (7 to 105)	Brass	3.1 (2.3)	3450	Direct, Electric
2SFX22GS	2.2 (8.3)	100 to 2000 (7 to 140)	Brass	3.0 (2.2)	3450	Direct, Gas
2SFX25GZ	2.5 (9.5)	100 to 2500 (7 to 175)	Brass	4.3 (3.2)	3450	Direct, Gas
2SFX30GS	3.0 (11.4)	100 to 2000 (7 to 140)	Brass	4.1 (3.1)	3450	Direct, Gas
2SFX30GZ	3.0 (11.4)	100 to 2500 (7 to 175)	Brass	5.1 (3.8)	3450	Direct, Gas
2SFX35GS	3.5 (13.2)	100 to 2000 (7 to 140)	Brass	4.8 (3.5)	3450	Direct, Gas
4SF						
4SF32ELS	3.2 (12.1)	100 to 3500 (7 to 245)	Brass	7.7 (5.7)	1725	Direct, Electric
4SF40ELS	4.0 (15.0)	100 to 3500 (7 to 245)	Brass	9.6 (7.2)	1725	Direct, Electric
4SF45ELS	4.5 (17.0)	100 to 3000 (7 to 210)	Brass	9.2 (6.9)	1725	Direct, Electric
4SF50ELS	5.0 (19.0)	100 to 3000 (7 to 210)	Brass	10.3 (7.7)	1725	Direct, Electric
4SF30GS1	3.0 (11.4)	100 to 3500 (7 to 245)	Brass	7.2 (5.4)	3200	Direct, Gas
4SF35GS1	3.5 (13.2)	100 to 3500 (7 to 245)	Brass	8.4 (6.3)	3200	Direct, Gas
4SF40GS1	4.0 (15.0)	100 to 3500 (7 to 245)	Brass	9.6 (7.2)	3200	Direct, Gas
4SF45GS1, GS118	4.5 (17.0)	100 to 3000 (7 to 210)	Brass	9.2 (6.9)	3200	Direct, Gas
4SF50GS1	5.0 (19.0)	100 to 3000 (7 to 210)	Brass	10.3 (7.7)	3200	Direct, Gas

Detailed Data Sheets are available for each model at www.catpumps.com/data-sheets/pump-parts-lists.



CAT PUMPS
The Pumps with Nine Lives
www.catpumps.com