


# P-Series High Pressure Plunger Pumps

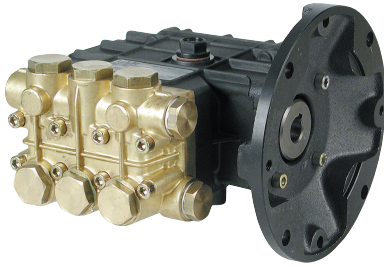

## Direct Drive, Electric Flange Models

5/8" Hollow Shaft with NEMA 56C Flange

	MODEL	GPM	PSI	POWER REQUIREMENTS	SEAL KIT	VALVE KIT	WEIGHT	LIST PRICE
<b>1750 RPM</b>	PND 1.0/20-Z	1.0	2000	1.5 HP Electric	UD-7	UD-1	13 lbs.	\$360.00
	PND 1.5/20-Z	1.5	2000	2 HP Electric	UD-7	UD-1	13 lbs.	\$360.00
	PND 2.0/20-Z	2.0	2000	3 HP Electric	UD-7	UD-1	13 lbs.	\$360.00
	PND 3.0/15-ZA*	3.0	1500	3 HP Electric	UD-7	UD-1	11 lbs.	\$360.00
	PND 3.0/20-Z	3.0	2000	4 HP Electric	UD-7	UD-1	13 lbs.	\$360.00
	PND 4.0/15-Z	4.0	1500	4 HP Electric	UD-8	UD-1	13 lbs.	\$360.00
<b>3400 RPM</b>	PNL 2.0/20-Z	2.0	2000	3 HP Electric	UD-7	UD-1	13 lbs.	\$360.00
	PNL 3.0/20-Z	3.0	2000	4 HP Electric	UD-7	UD-1	13 lbs.	\$360.00

\* "A" denotes aluminum head

# M-Series High Pressure Plunger Pumps

- 9-1/2" L x 8-1/2" W x 4-1/2" H (Solid Shaft Model)
- Brass Manifold
- Heat Treated Crankshaft
- Stainless Steel Piston Guides
- Replaceable Teflon Coated Body Guides
- High Strength Aluminum Alloy Connecting Rods
- Heavy Duty Flat Base High Pressure Seals
- 20 oz. Capacity Vented Oil Bath Crank Case
- 1/2" Inlet 3/8" Outlet
- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Industrial Quality Tapered Roller Bearings
- Max. Fluid Temp. 160°F



## Solid Shaft Models

24 mm Keyed, Solid Shaft

	MODEL	GPM	PSI	POWER REQUIREMENTS	SEAL KIT	VALVE KIT	WEIGHT	LIST PRICE
<b>1450 RPM</b>	MC 13/20-S	3.5	3000	7 HP Electric	UD-28	UD-2	23 lbs.	\$420.00
	MC 15/20-S	4.0	3000	7.5 HP Electric	UD-28	UD-2	23 lbs.	\$420.00
	MC 18/20-S	5.0	3000	10 HP Electric	UD-9	UD-2	23 lbs.	\$420.00
<b>1750 RPM</b>	MD 4.0/20-S	4.0	2000	5 HP Electric	UD-28	UD-2	23 lbs.	\$420.00
	MD 4.0/30-S	4.0	3000	7.5 HP Electric	UD-28	UD-2	23 lbs.	\$420.00
	MD 5.0/25-S	5.0	2500	7.5 HP Electric	UD-28	UD-2	23 lbs.	\$420.00
<b>Rail Kits</b>	8702.10	Standard ( 7/8" ) Rail Kit for M-Series Solid Shaft Pumps						\$12.80
	8702.20	Tall ( 2-1/2" ) Rail Kit for M-Series Solid Shaft Pumps						\$44.20