


ZW SERIES Industrial Duty Plunger Pumps

- Increased Fin Depth Increases Surface Area to Maximize Heat Dissipation
- Stainless Steel Unitized Check Valves
- Heat-Resistant Solid Ceramic Plungers Operating on Lubricated Packings
- Direct Drive Mounting Flange

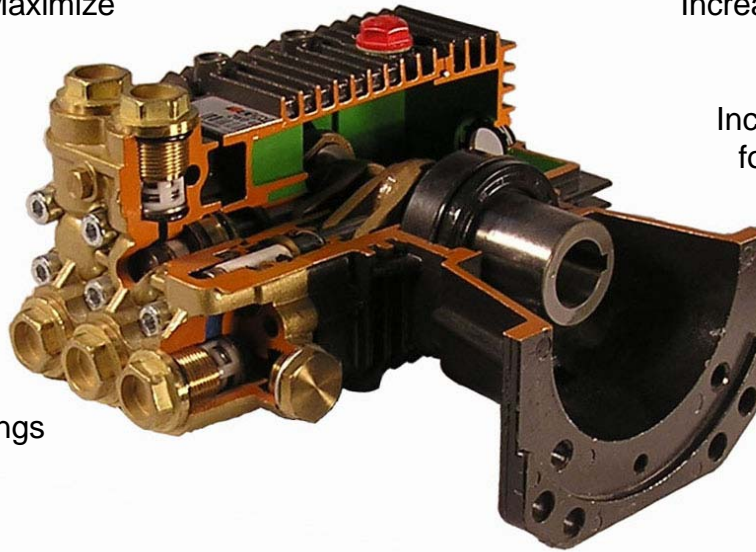

- Reinforced Crankcase for Increased Load Capacity
- Enlarged Crankcase Increases Oil Capacity for Better Lubrication and Lower Operating Temperatures
- One-Piece Industrial-Grade Oversized Bronze Connecting Rods

ZWD

Series Pumps-Gas



3400 RPM - Gas Engine Flange

- 1/2" FPT Inlet, 3/8" FPT Discharge
- Anodized, Die-Cast Aluminum Crankcase
- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Buna-Textile V-Packings
- Reversible Crankcase for Right or Left Hand Mounting
- Gas Engine Mounting Flange

<u>MODEL #</u>	<u>GPM</u>	<u>PSI</u>	<u>RPM</u>	<u>SHAFT</u>	<u>PISTON</u>	<u>WT.</u>
ZWD 2535 G	2.5	3500	3400	3/4" Hollow	15mm	16.5
ZWD 3030 G	3.0	3200	3400	3/4" Hollow	15mm	17.5
ZWD 3035 G	3.0	3500	3400	3/4" Hollow	15mm	17.5
ZWD 3035 G	3.0	3500	3400	1" Hollow	15mm	17.5
ZWD 3535 G	3.4	3500	3400	1" Hollow	15mm	17.5
ZWD 4035 G	4.0	3500	3400	1" Hollow	15mm	17.5
ZWD 3040 G	3.0	4000	3400	1" Hollow	15mm	17.5
ZWD 3540 G	3.4	4000	3400	1" Hollow	15mm	17.5
ZWD 4040 G	4.0	4000	3400	1" Hollow	15mm	17.5